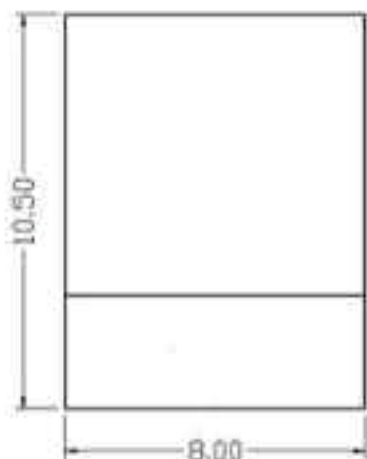
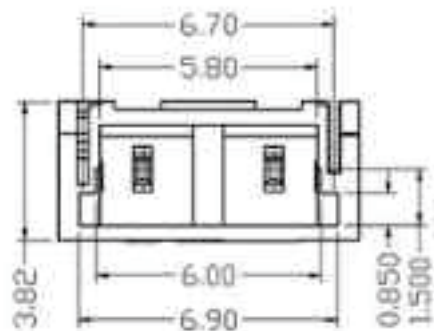


NOTE:

1.SPECIFICATIONS:

Current rating:1A AC,DC


Voltage rating:1300V AC,DC

Contact Resistance:20m Ω max

Insulation Resistance:1000M Ω in

Withstanding Voltage:3800V AC/minute

Temperature range:-25°C to +85°C

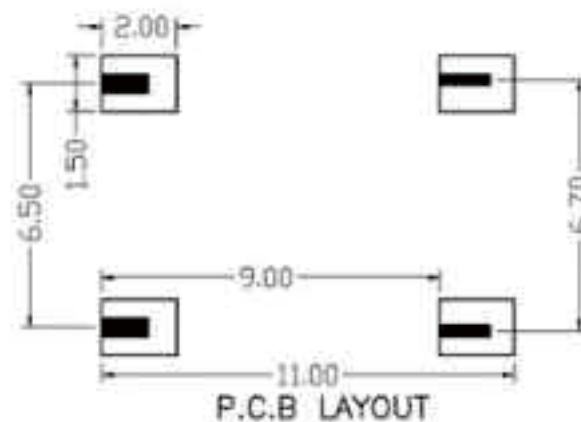

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION





X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

BHS-WR-02-LF
SERIES T LEADFREE
02WAY
REEL
90°SMT

DESCRIPTION:

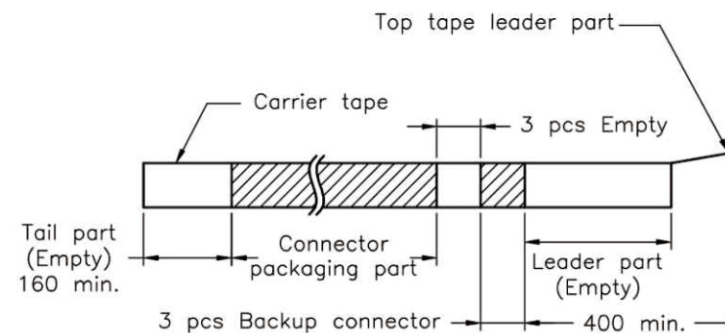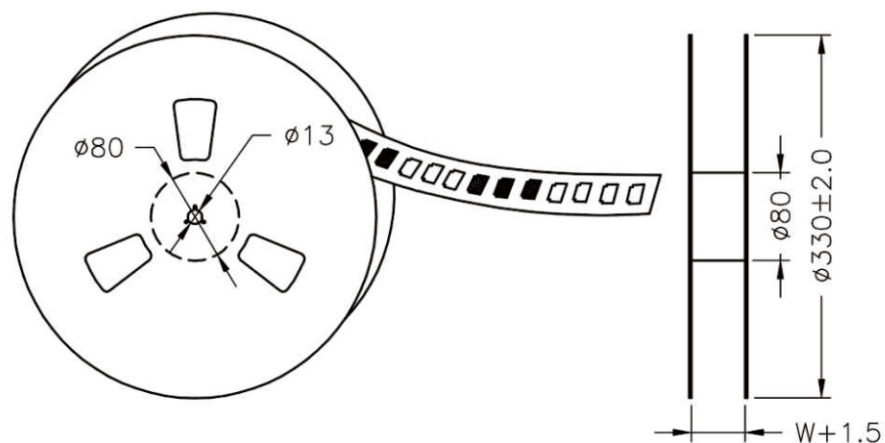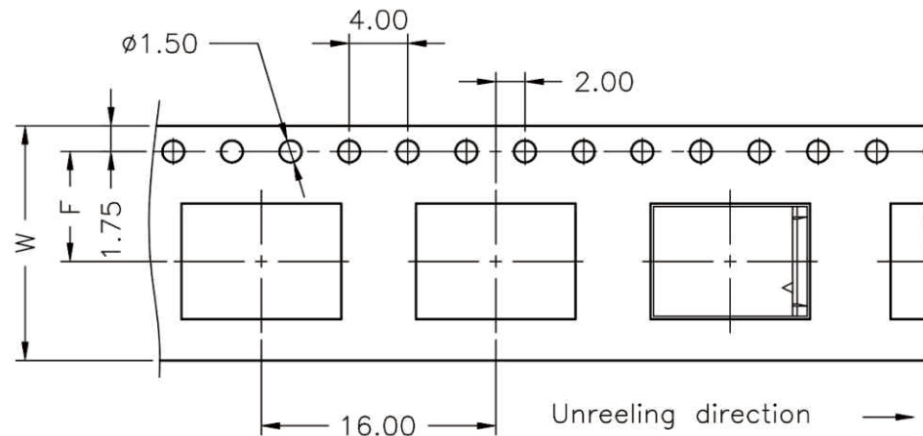

Number of Contacts	W±0.3	F±0.1	Q'ty/Reel
02P	16	7.50	1,000

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

BHS-WR-02-LF
SERIES T T LEADFREE
02WAY
REEL
90°SMT

DESCRIPTION: