




NOTE:

1. 表面處理
鍍錫 40u"以上

1. SURFACE TREATMENT:
TIN PLATING
THICKNESS MORE THAN 40u"

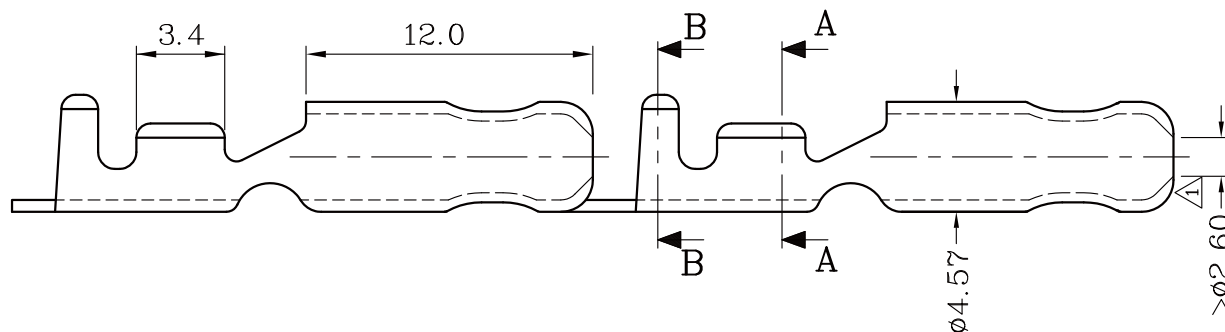

SEC. B-B



SEC. A-A

材質 MATERIAL	JIS2680H	一般公差 GENERAL TOLERANCE	X : ±0.5 X.X : ±0.3 X.XX : ±0.1	X.XXX : ±0.05 ANGLES ±3°	比例 SCALE	3:1
料厚 THICKNESS	0.4	包裝數量 PACKING Q'TY	6000 PCS/R	適用電線 WIRE RANGE	20~16	
間距 PITCH	24.0					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BLT45-Mx-16-LF

SERIES | LEADFREE
16~20 AWG
B: BRASS
T: TIN
MALE TERMINAL

DESCRIPTION: 5φ歐洲公