





CRIMP DIM :
FERRULE : HEX 6.98

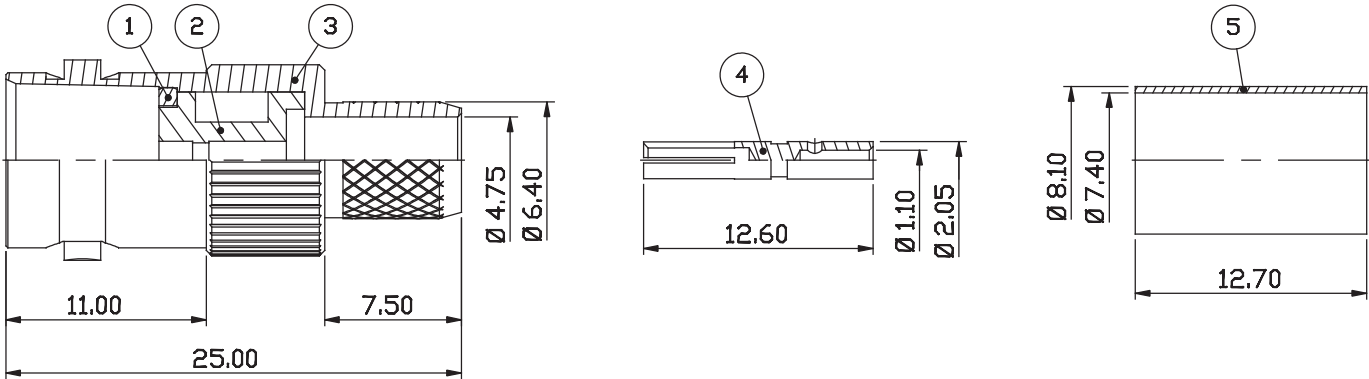

5	FERRULE	BRASS	1	NICKEL	8.1x7.4x12.7	C2700
4	CENTER PIN	P.H. Bronze	1	GOLD (4u")		C5441
3	BODY	BRASS	1	NICKEL		C3604
2	INSULATOR	PTFE	1	--		ASTM D1710
1	WASHER	BRASS	1	NICKEL		C3604
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH	ITEM #	CODE #

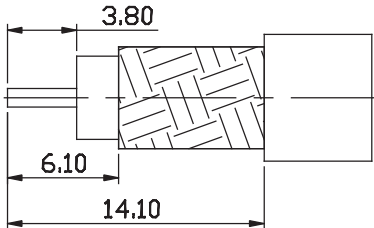

RECOMMEND CABLE STRIPPING

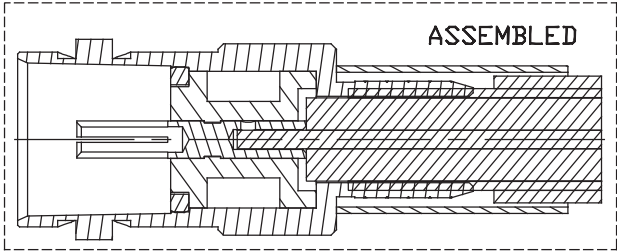

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BNC-JC-1694A-LF

SERIES

1694A

CRIMP

JACK

LEADFREE

DESCRIPTION: BNC Jack Crimp for BELDEN 1694A,RG6-CATV