

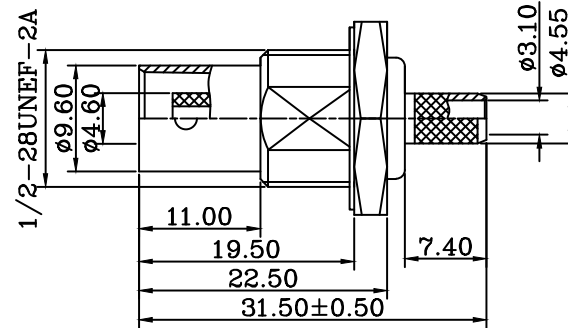





1.CRIMPED FERRULE HEX CRIMP SIZE .213"

2.CRIMPED CONTACT PIN HEX CRIMP SIZE .068"



RECOMMENDED
MOUNTING HOLE



RECOMMENDED
CABLE STRIPPING DIM'S

10	HEX NUT	ZINC	1	NICKEL PLATED
9	LOCK WASHER	IRON	1	NICKEL PLATED
8	FERRULE	BRASS	1	NICKEL PLATED
7	CONTACT PIN	BRASS	1	GOLD PLATED
6	REAR BODY	BRASS	1	NICKEL PLATED
5	GASKET	RUBBER	1	RED
4	WASHER	IRON	1	NICKEL PLATED
3	INSULATOR	POM	1	NATURAL
2	INSULATOR	POM	1	NATURAL
1	BODY	ZINC	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE

0.5-15 = ±0.15
15-30 = ±0.30
30-120 = ±0.60
>120 = ±1.00

ANGLES
±5°

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

BNC-JCPBNW-58-LF
SERIES | | | | | LEADFREE
| | | | | Rg58
| | | | | WASHER
JACK | NUT
CRIMP | BACK
| | PANEL

DESCRIPTION: BNC FEMALE BULKHEAD CRIMP, 50 OHM FOR RG58U CABLE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com