


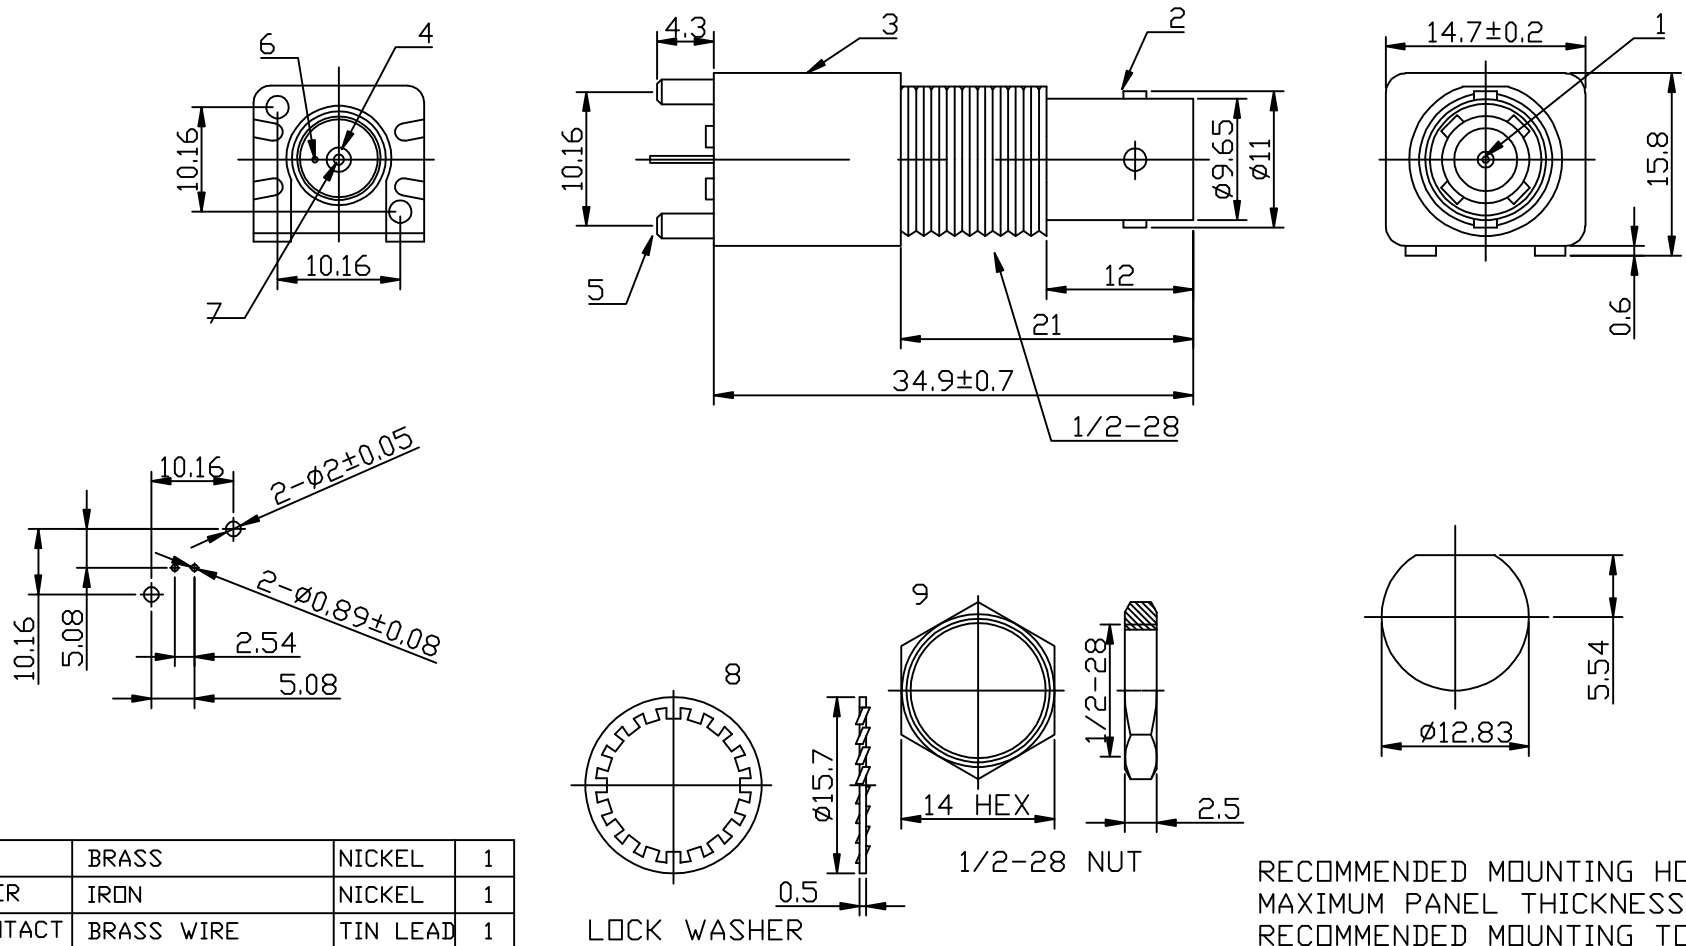

9	NUT	BRASS	NICKEL	1
8	LOCK WASHER	IRON	NICKEL	1
7	CENTER CONTACT	BRASS WIRE	TIN LEAD	1
6	SOLDER TAIL	BRASS WIRE	TIN LEAD	1
5	MOUNTING POST	BRASS	TIN LEAD	1
4	INSULATOR	PLASTIC	NONE	1
3	HOUSING	PBT	BLACK	1
2	BODY	ZINC ALLOY	NICKEL	1
1	CENTER CONTACT	PHOSPHOR BRONZE	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RECOMMENDED MOUNTING HOLE
 MAXIMUM PANEL THICKNESS:5.5MM
 RECOMMENDED MOUNTING TORQUE:
 12 INCH-POUNDS MAX

RoHS Compliant

TOLERANCES ARE	
0.5-5	=±0.2
6-30	=±0.4
30-120	=±0.6
120-315	=±1
315-1000	=±1.6
1000-2000	=±2.4



ORDER INFORMATION

BNC-JD15WBK-50-LF
 SERIES JACK
 LEADFREE
 50 OHM
 BLACK
 NUT+WASHER
 WIDE 15.8mm
 DIP 180°

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

DESCRIPTION: 50ΩBNC VERTICAL PCB/PANEL MOUNT JACK