
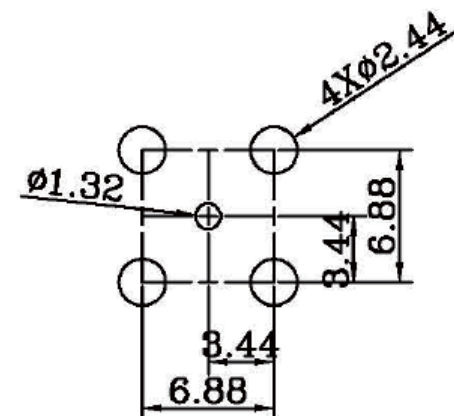
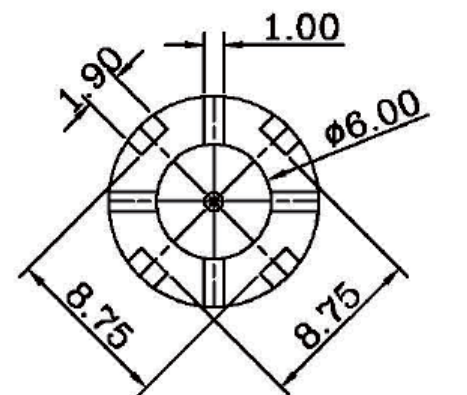
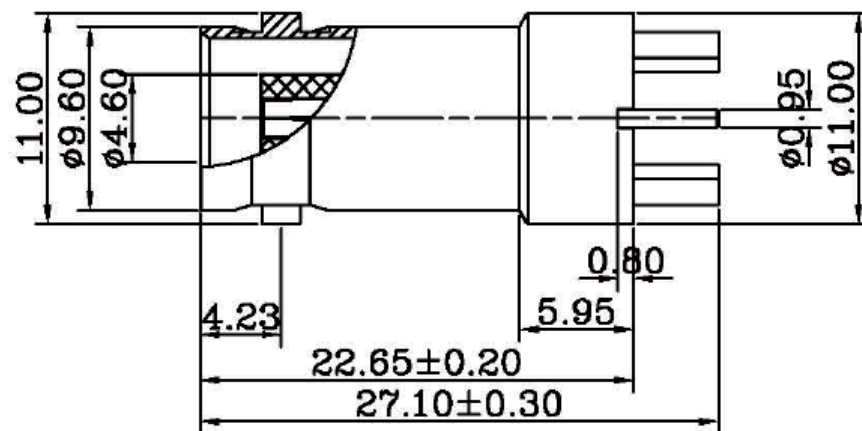




RECOMMENDED
PCB LAYOUT
(BOTTOM VIEW)

ELECTRICAL CHARACTERISTICS

IMPEDANCE	50 OHMS
FREQ RANGE	0-4 GHZ
MAX PEAK VOLTAGE	500V
INSULATION RESISTANCE	500 MEGOHM /MIN

4	WASHER	IRON	1	NICKEL PLATED
3	CONTACT PIN	BRASS	1	GOLD PLATED
2	INSULATOR	TEFLON	1	NATURAL
1	BODY	BRASS	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BNC-JDL271-50-LF

SERIES LEADFREE
50 WAY
TOTAL LONG 27.1mm
DIP 180°
JACK

DESCRIPTION: BNC FEMALE RECEPTACLE(50 OHM)