
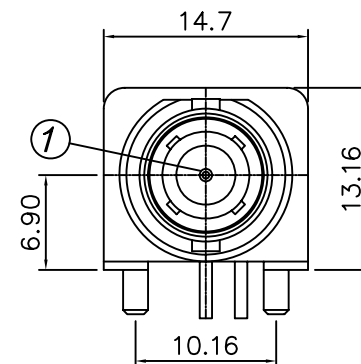
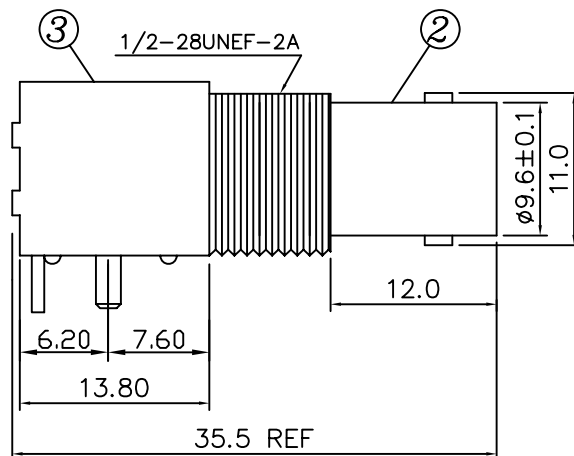
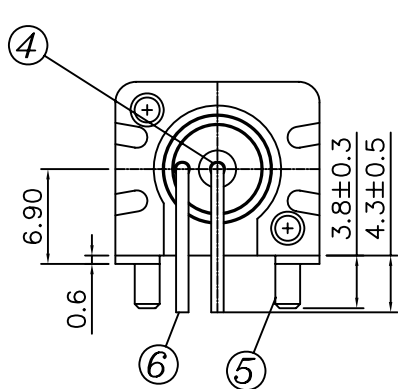


RECOMMENDED PC BOARD LAYOUT
WITHOUT MOUNTING POSTS

MATERIAL & FINISH

MATERIAL & FINISH

- ① CENTER CONTACT :BRONZE,GOLD PLATING
- ② BODY :ZINC ALLOY NICKEL PLATING
- ③ HOUSING :PBT (94 V-0) WHITE
- ④ INSULATOR :PE-606
- ⑤ MOUNTING POST :BRONZE, TIN PLATING
- ⑥ SOLDER TAIL :COPPER WIRE, TIN PLATING
- ⑦ WASHER :STEEL, NICKEL PLATING
- ⑧ NUT :BRASS, NICKEL PLATING

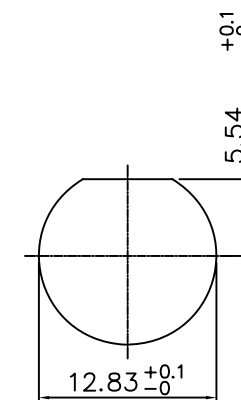

RECOMMENDED MOUNTING HOLE
MAXIMUM PANEL THICKNESS:5.5MM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BNC-JR13XWH-xx-LF
SERIES JACK DIP 90° LEADFREE
50:50 OHM
75:75 OHM
WHITE
NON NUT/WASHER
HIGH 12.9mm

DESCRIPTION: 50 & 75 OHM BNC R/A PCB MOUNT JACK