


RECOMMENDED  
MOUNTING HOLE

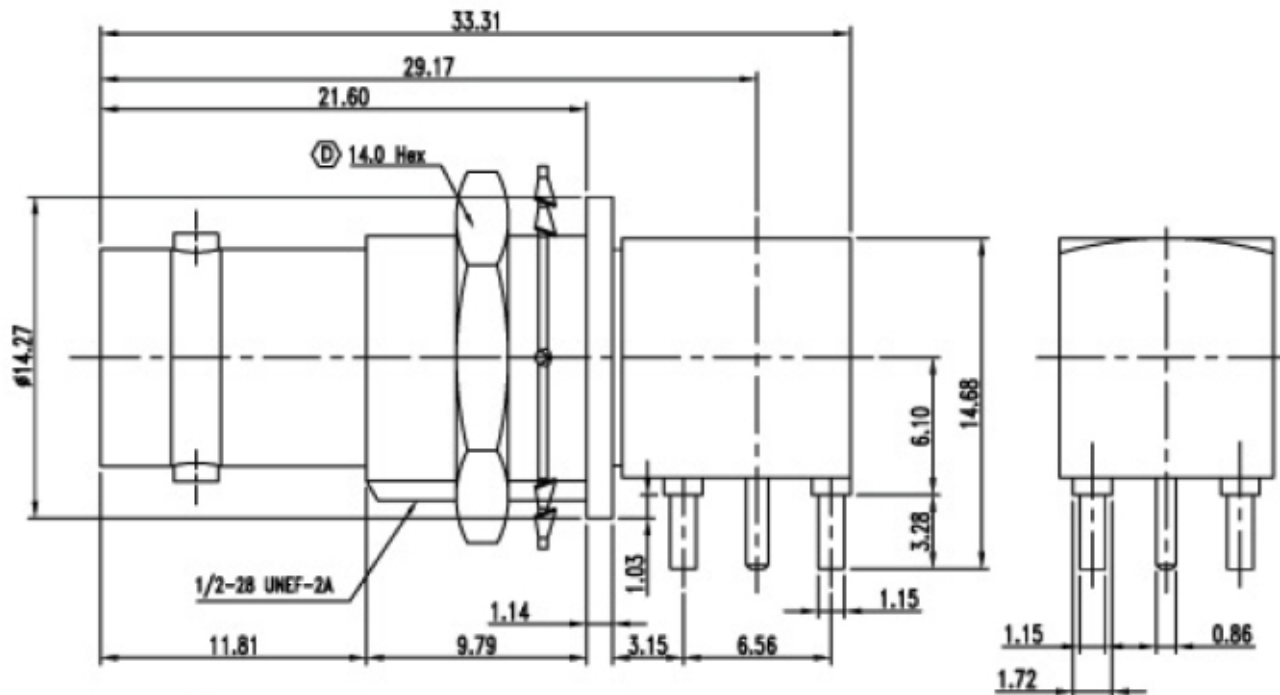

### SPECIFICATION :

- 1.IMPEDANCE : 50 OHMS
- 7.GOLD FINISH : 3 microinches OVER BeCu
- 8.NICKEL FINISH : 80 microinches OVER BRASS
- 11.REMOVED ALL BURRS & BREAK ALL SHARP EDGES
- 12.ALL CORNERS TO BE 0.25 R MAX
- 13.ALL DIAMETERS TO BE CONCENTRIC WITHIN 0.125mm

BNC-JRPB-50-LF  
LEADFREE

7	washer	1	BRASS	NICKEL
6	nut	1	BRASS	NICKEL
5	dielectric	1	PTFE	NONE
4	dielectric	1	PTFE	NONE
3	pin	1	BeCu	GOLD
2	body	1	BRASS	NICKEL
1	body	1	BRASS	NICKEL
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. BNC-JRPB-50

RoHS Compliant

DWG NO. BNC-JRPB-50

CHECKED BY CY

TOLERANCES ARE

FILE NO.

DRAWING BY

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG


DESCRIPTION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE