


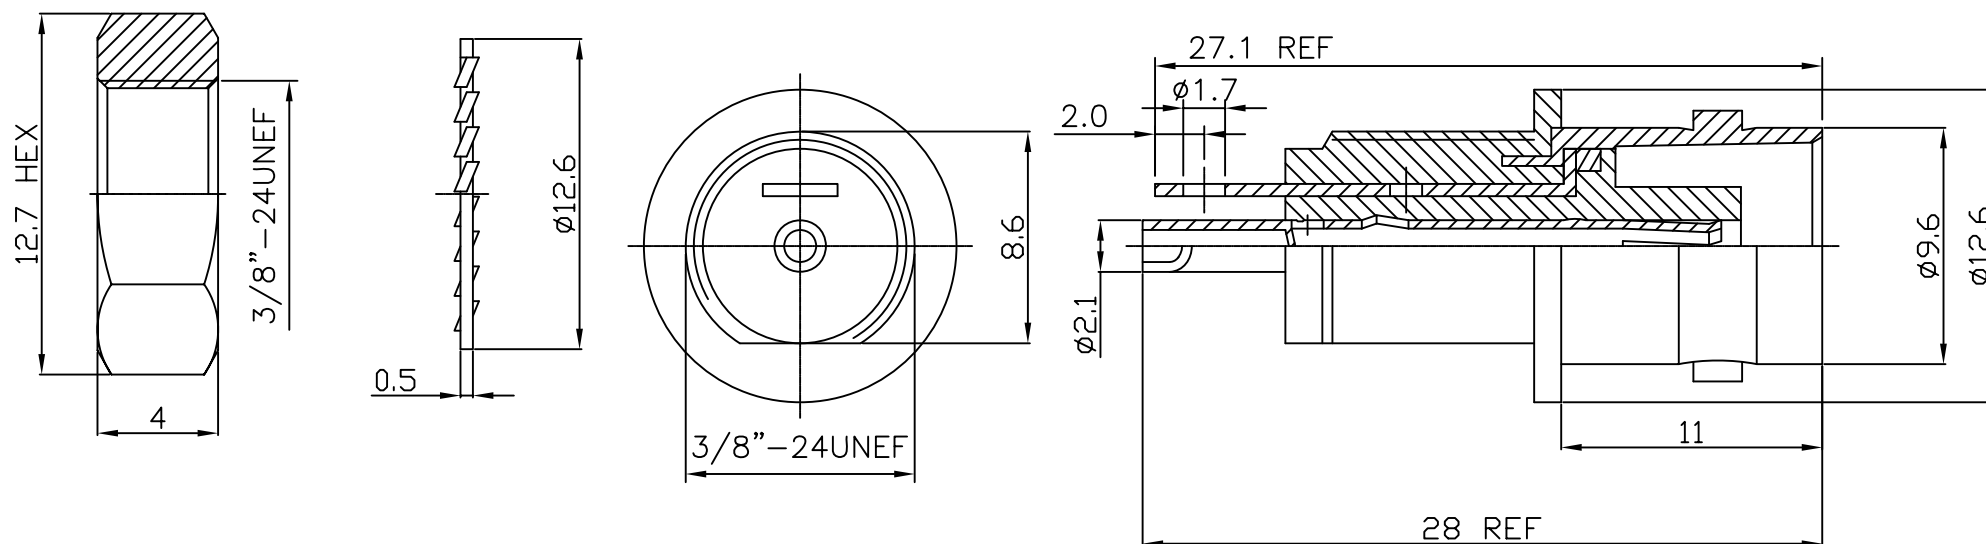

ELECTRICAL SPECIFICATIONS:

VOLTAGE RATING:AC 500V

WITH STANDING VOLTAGE:AC 1,500V ONE MINUTE

INSULATION RESISTANCE:1,000MΩMIN AT DC 500V

CONTACT RESISTANCE :3MΩ MAX AT DC 1A

FREQUENCY RANGE :0-4GHZ

VSWR:1.2MAX 0-2GHZ

IMPEDANCE :50/75 OHM VERSIONS

7	WASHER	STEEL	NICKEL	1
6	NUT	BRASS	NICKEL	1
5	WASHER	BRASS	NICKEL	1
4	GROUND RING	BRASS	NICKEL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	DELRIN	WHITE	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BNC-JSPAI-xx-LF
SERIES JACK LEADFREE
50:50 OHM
75:75 OHM
ISOLATED
PANEL FRONT
SOLDER

DESCRIPTION:BNC FEMALE ISOLATED GROUND BULKHEAD