
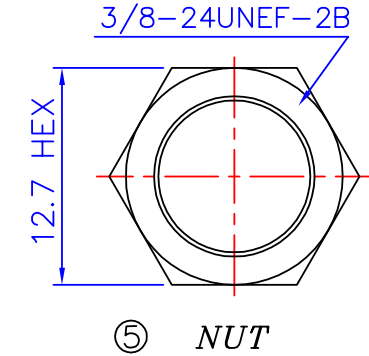
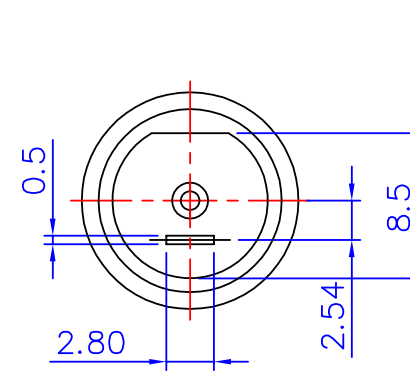
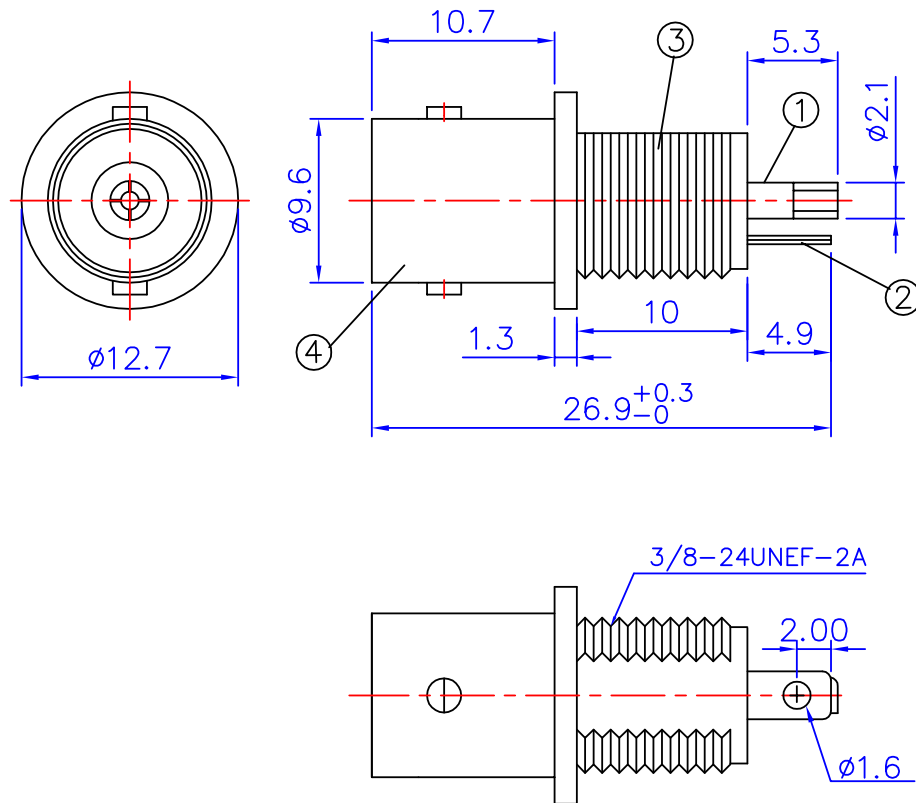


RECOMMENDED
MOUNTING HOLE

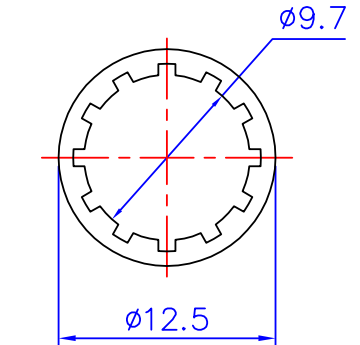

⑥ LOCK WASHER

MATERIAL & FINISH

- ① CENTER CONTACT : PHOSPHOR BRONZE, GOLD PLATED
- ② GROUND RING : BRASS, TIN PLATED
- ③ INSULATOR : PBT (94 V-0)
- ④ BODY : ZINC ALLOY, NICKEL PLATED
- ⑤ NUT : BRASS, NICKEL PLATED
- ⑥ WASHER : STEEL, NICKEL PLATED

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X. ± 0.30

.XX. ± 0.20

.XXX. $\pm$

ANG. $\pm$

PPOJECTION

照片框

ORDER INFORMATION

BNC-JSPAIZA-75-LF

SERIES
JACK
LEADFREE
75:75 OHM
ZINC ALLOY
ISOLATED
PANEL FRONT
SOLDER

DESCRIPTION: 75Ω BNC JACK ISOLATED GROUND BULKHEAD WITH FITTING