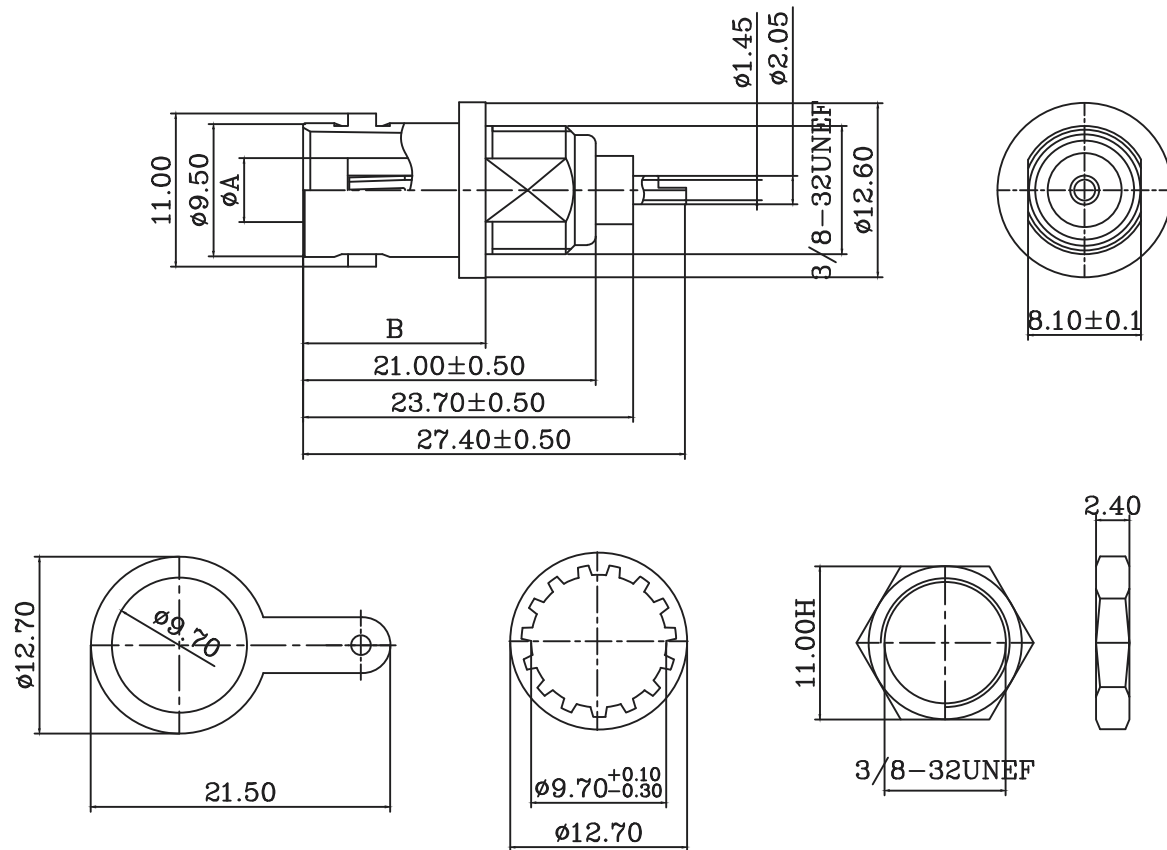


RECOMMENDED  
MOUNTING HOLE

| MODEL NO. | $\phi A$ | B     |
|-----------|----------|-------|
| (50 Ohm)  | 4.60     | 13.10 |
| (75 Ohm)  | 3.00     |       |

| 6    | NUT            | ZINC     | 1    | NICKEL PLATED |
|------|----------------|----------|------|---------------|
| 5    | WASHER TAIL    | BRASS    | 1    | NICKEL PLATED |
| 4    | WASHER         | IRON     | 1    | NICKEL PLATED |
| 3    | CENTER CONTACT | P-BRONZE | 1    | GOLD PLATED   |
| 2    | INSULATOR      | POM      | 1    | NATURAL       |
| 1    | BODY           | ZINC     | 1    | NICKEL PLATED |
| ITEM | DESCRIPTION    | MATERIAL | Q'TY | FINISHED      |

RoHS Compliant

TOLERANCES ARE

0.5-15 =  $\pm$ 0.15  
15-30 =  $\pm$ 0.30  
30-120 =  $\pm$ 0.60  
>120 =  $\pm$ 1.00

ANGLES  
 $\pm$ 3°

照片框

ORDER INFORMATION

BNC-JSPANWT-xx-LF  
SERIES  
JACK  
SOLDER  
PANEL FRONT  
LEADFREE  
50:50 OHM  
75:75 OHM  
TAB  
WASHER  
NUT

DESCRIPTION: BNC FEMALE BULKHEAD RECEPTACLE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION