
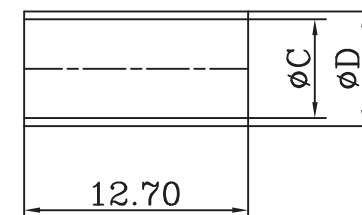



RECOMMENDED
CABLE STRIPPING DIM'S

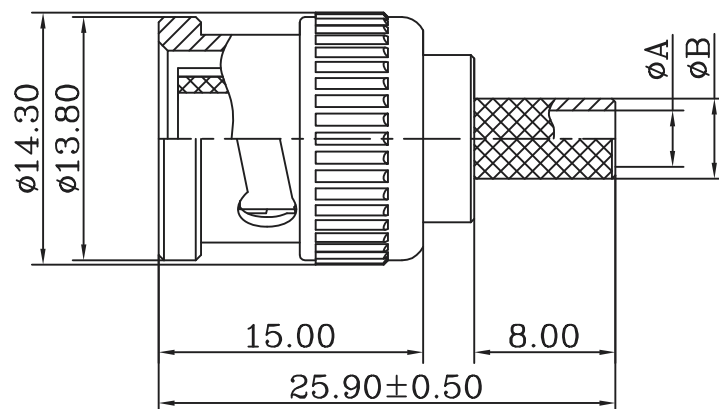

MODEL NO.	øA	øB	øC	øD	øE	PART NO.
(RG58U)	ø3.2	ø4.55	ø5.6	ø6.5	ø1.0	BNC-PC-58
(RG59U)	ø3.9	ø5.5	ø6.4	ø7.3	ø0.8	BNC-PC-59
RG8X	ø4.2	ø5.5	ø6.4	ø7.3	ø1.6	BNC-PC-8

9	FERRULE	BRASS	1	NICKEL PLATED
8	CONTACT PIN	BRASS	1	GOLD PLATED
7	WASHER	ZINC	1	NICKEL PLATED
6	SPRING	65Mn	1	NATURAL
5	OUT CONTACT	ZINC	1	NICKEL PLATED
4	GASKET	PVC	1	RED
3	INSULATOR	POM	1	NATURAL
2	BODY	ZINC	1	NICKEL PLATED
1	SHELL	ZINC	1	NICKEL PLATED
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

1.CRIMPED FERRULE HEX CRIMP SIZE

RG58U	RG59U	RG8X
.213"	.255"	.255"

2.CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

RoHS Compliant

TOLERANCES ARE

0.5-15 = ±0.15
15-30 = ±0.30
30-120 = ±0.60
>120 = ±1.00
ANGLES
±5°

照片框

ORDER INFORMATION

BNC-PC-xx-LF
SERIES | LEADFREE
58:RG58
59:RG59
8:RG8
CRIMP
MALE

DESCRIPTION: BNC MALE CRIMP TYPE (50 OHM)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION