



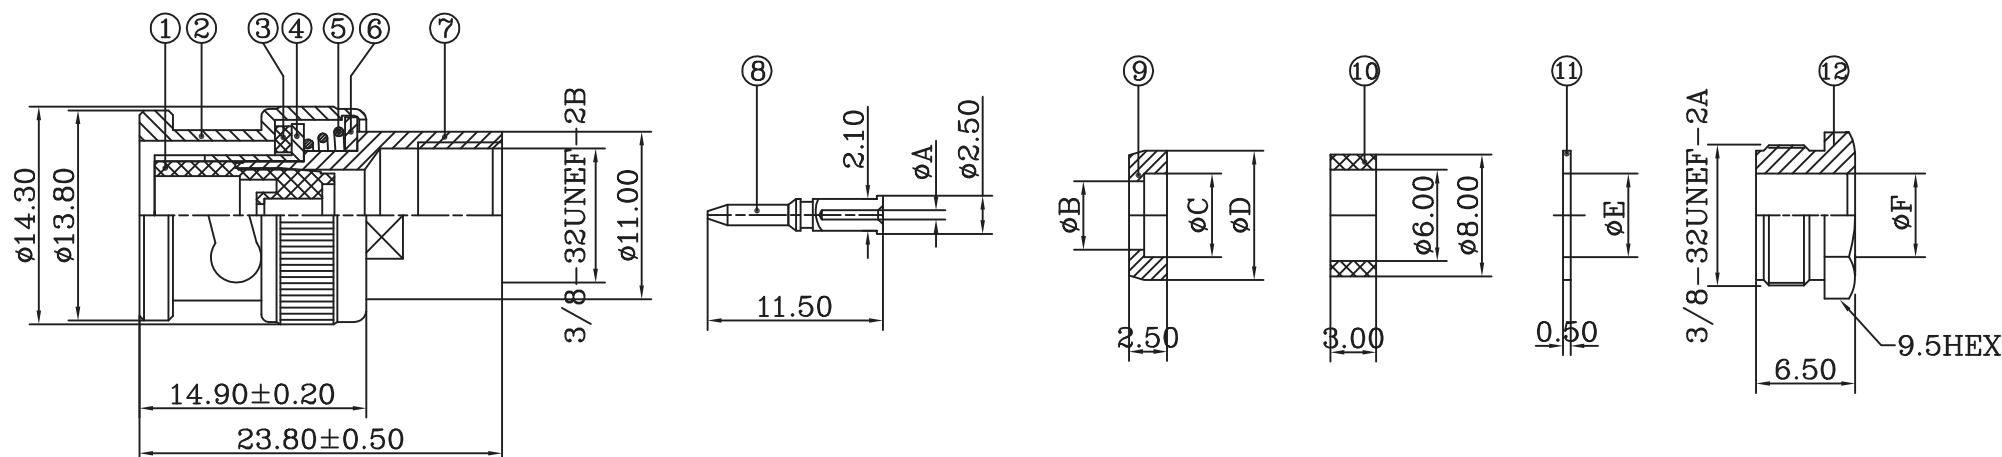

12	NUT	ZINC	1	NICKEL PLATED
11	WASHER	IRON	1	NICKEL PLATED
10	GASKET	RUBBER	1	RED
9	WASHER	ZINC	1	NICKEL PLATED
8	CENTER CONTACT	BRASS	1	GOLD PLATED
7	BODY	ZINC	1	NICKEL PLATED
6	WASHER	ZINC	1	NICKEL PLATED
5	SPRING	65Mn	1	NATURAL
4	OUT CONTACT	ZINC	1	NICKEL PLATED
3	GASKET	PVC	1	RED
2	SHELL	ZINC	1	NICKEL PLATED
1	INSULATOR	POM	1	NATURAL
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RECOMMENDED
CABLE STRIPPING DIM'S



MODEL NO.	A	B	C	D	E	F	DRAWING NO.
(RG58U)	1.0	4.5	5.5	7.5	6.35	5.5	BNC-PS-58
(RG59U)	0.8	5.5	6.5	7.5	6.35	6.5	BNC-PS-59
(RG6U)	1.2	6.0	7.3	8.5	7.3	7.3	BNC-PS-6
RG8X	1.6	5.5	6.5	7.5	6.35	6.5	BNC-PS-8

RoHS Compliant

TOLERANCES ARE

0.5-15 = ± 0.15
15-30 = ± 0.30
30-120 = ± 0.60
>120 = ± 1.00

ANGLES
 $\pm 3^\circ$

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

BNC-PS-xx-LF

SERIES
LEADFREE
58:RG58
59:RG59
6:RG6
8:RG8
SOLDER
MALE

DESCRIPTION: BNC MALE CLAMP TYPE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com