

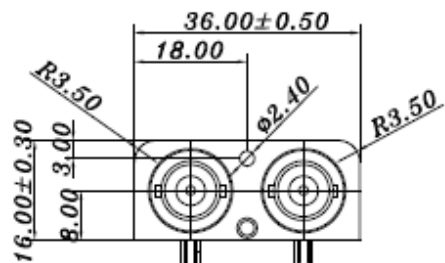


PCB LAYOUT



CIRCUIT DIAGRAM

(Left Right Type)

7	BREAK TERMINAL	P-BRONZE	2	GOLD PLATED
6	SLIP SPRING	P-BRONZE	2	GOLD PLATED
5	INSULATOR	PBT	2	NATURAL
4	SHEET COPPER	BRASS	1	NICKEL PLATED
3	CONTACT PIN	BRASS	2	NICKEL PLATED
2	BODY	ZINC	2	NICKEL PLATED
1	HOUSING	ABS UL94V0	1	BLACK
ITEM	DESCRIPTION	MATERIAL	Q'TY	FINISHED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BNCA2-JRE2SW-50-LF

SERIES

JACK

DIP 90°

SWITCH

50 OHM

LEADFREE

DESCRIPTION: