
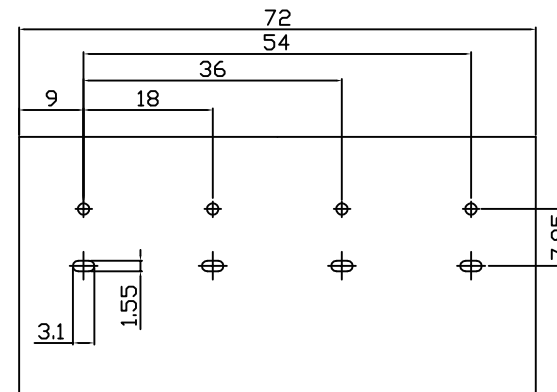


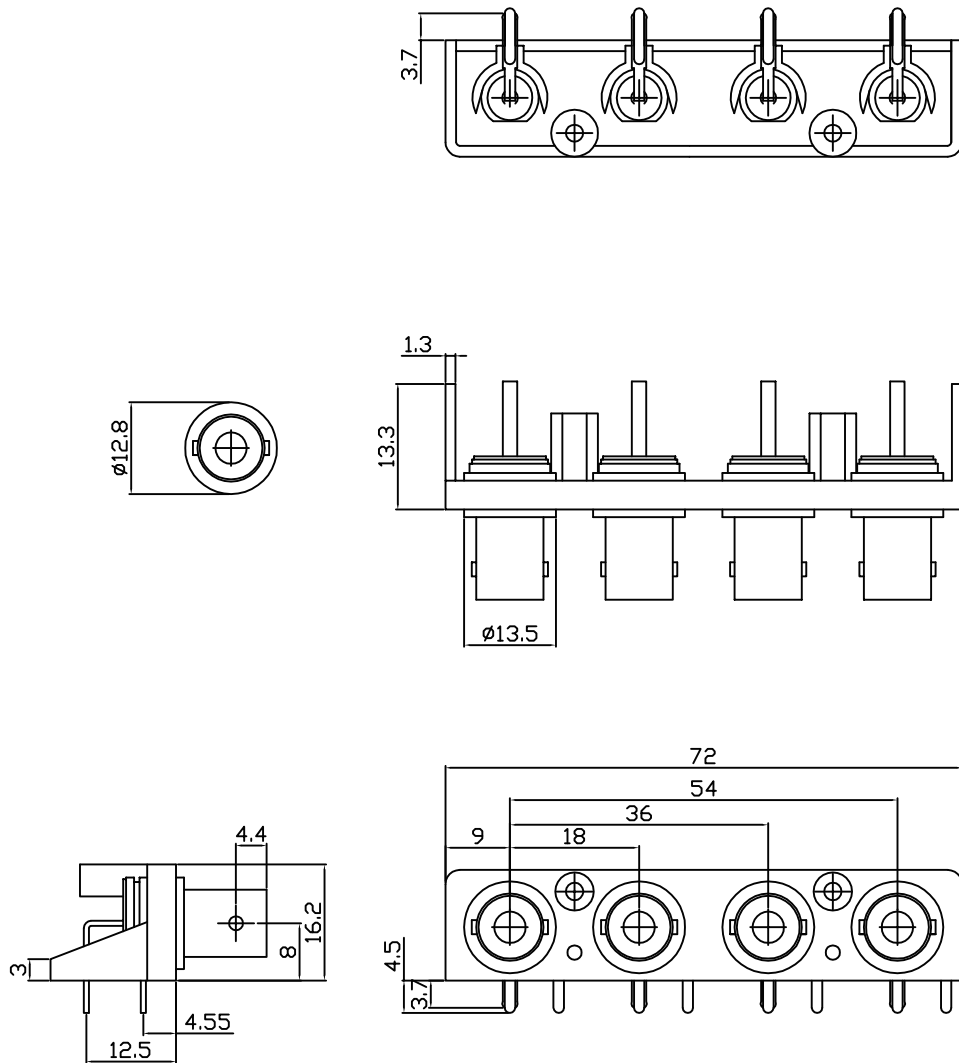

1.MATERIALS :

- BODY : ZINC ALLOY,DIE CASTIN NICKEL PLATED.
 - CONTACT: BRASS NICKEL PLATED.
 - BRACKET: A.B.S.
 - INSULATOR: ENGINEER PLASTIC POM.
- NOMIAL IMPEDENCE 50(75)OHMS.
 - FREQUENCY RANGE: 0-2 GHZ.
 - MAX PEAK VOLTAGE: 500V
 - DIELECTRIC STRENGTH WITHSTAND 1.5KV NNS.
 - INSULATION RESISTANCE AT 500 VDE 5000 MEGOHMS MAL.

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

UNLESS OTHERWISE SPECIFIED
TOLERANCES

0.5-5	±0.2
5-30	±0.4
30-120	±0.6
120-315	±1
315-1000	±1.6
1000-2000	±2.4

ORDER INFORMATION



DESCRIPTION: BNC FEMALE R/A 1*4 PORT