

1. MATERIALS :

- a. BODY : ZINC ALLOY, DIE CASTIN NICKEL PLATED.
  - b. CONTACT: BRASS NICKEL PLATED.
  - c. BRACKET: A.B.S.
  - d. INSULATOR: ENGINEER PLASTIC POM.
2. NOMIAL IMPEDENCE 50(75)OHMS.
3. FREOUENCY RANGE: 0-2 GHZ.
4. MAX PEAK VOLTAGE: 500V
5. DIELECTRIC STRENGTH WITHSTAND 1.5KV NNS.
6. INSULATION RESISTANCE AT 500 VDE 5000 MEGOHMS MAL.

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE

SIZE A4


UNLESS OTHERWISE SPECIFIED TOLERANCES

0.5-5	=±0.2
5-30	=±0.4
30-120	=±0.6
120-315	=±1
315-1000	=±1.6
1000-2000	=±2.4

PJECTION

照片框

**ORDER INFORMATION**

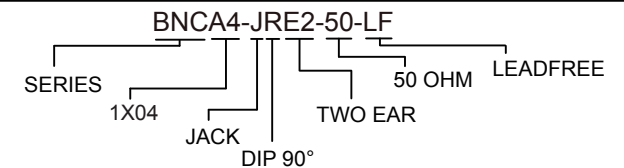

DESCRIPTION: BNC FEMALE R/A 1\*4 PORT