


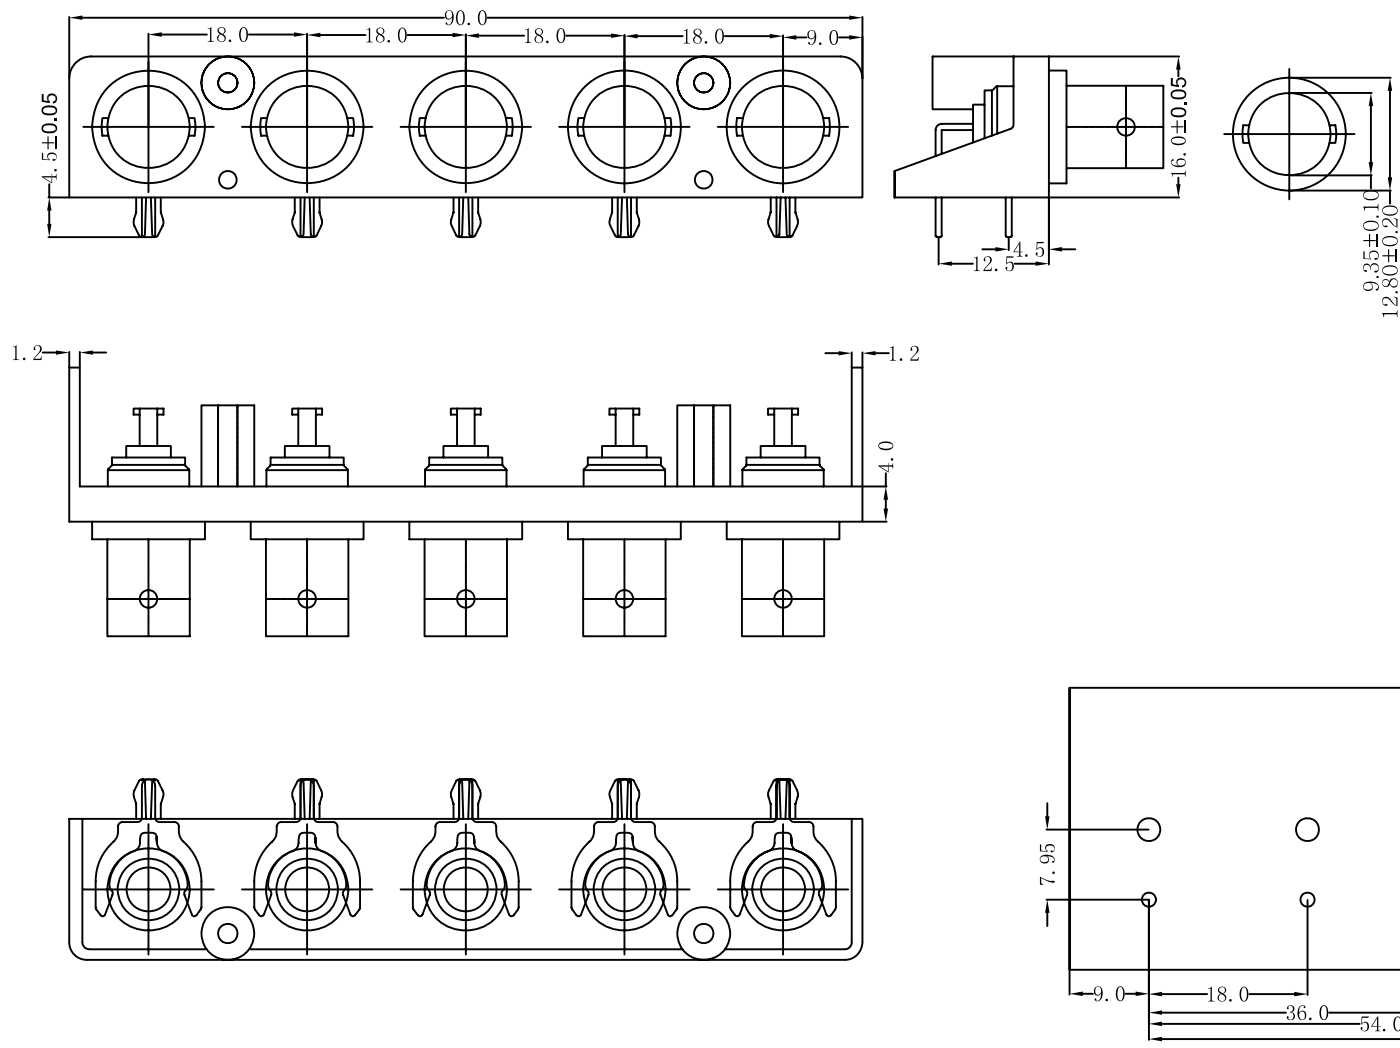

1: MATERIALS:

a: BOOY:ZINC ALLOY.DIE CASTIN NIXEL PLATED

b: CONTACT:BARSS NICKEL FLATED

c: BRACKET:A.B.S. UL 94HB

d: INSULATOR: ENGINEER PLASTIC POM VL 94HB

2: NOMIAL IMPEDENCE 50(75)OHMS.

3: FREOUENCY RANGE:0-2 GHZ.

4: MAX PEAK VOLTAGE: 500V

5: DIELECTRIC STRENGTH WITHSTAND 1.5KV NNS FOR ONE MINUTE

6: INSULATION RESISTANCE AT 500 VDEC 5000 MEGOHMS MAL.

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

ORDER INFORMATION

BNCA5-JRE2-xx-LF

SERIES

LEADFREE

50:50 OHM

75:75 OHM

EAR

DIP 90°

JACK

DESCRIPTION: