





1. DIMENSION

Unless otherwise specified all.
Dimensions in millimeters &
inches. Values in brackets
are inches equivalents

FRACTIONS $\pm 4/10$

REMOVE BURRS & SHARP EDGES .250 MAX.
MACHINE FILLET RADIUS .250 R MAX.

ALL DIAS. TO BE CONCENTRIC
WITHIN .125 T.I.R.
INTERPRETATION PER MIL STD
8 10 & 12

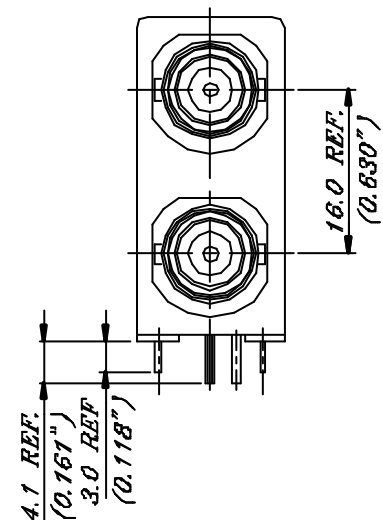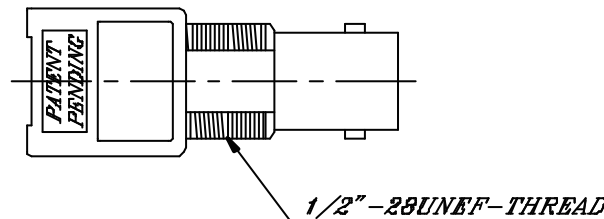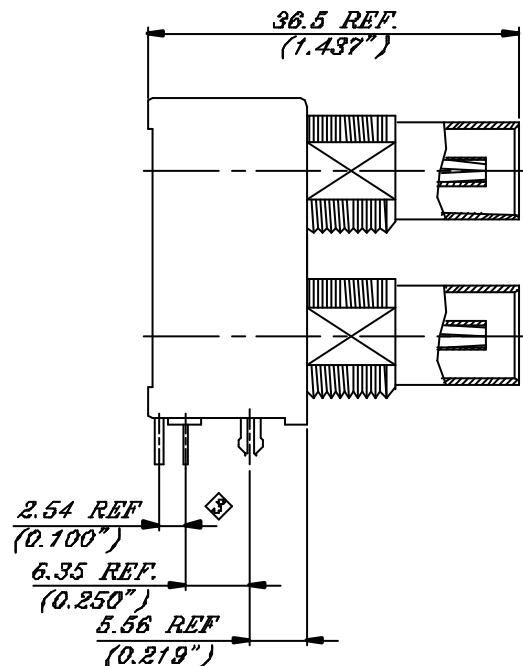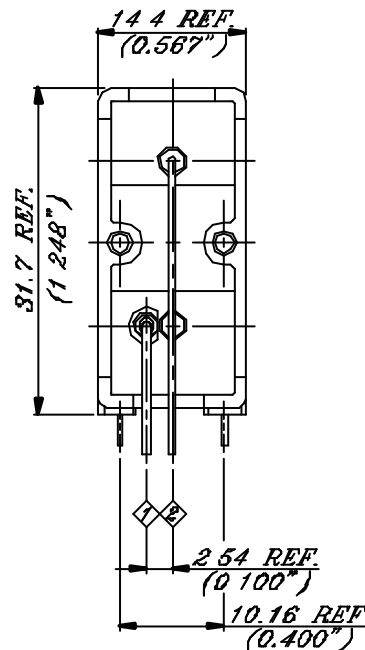

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

BNCB1-JRXXFM-xx-LF

SERIES

LEADFREE

50:50 OHM

75:75 OHM

FULL METAL

JACK

NON POST

DIP 90°

DESCRIPTION: ALL METAL TYPE DUAL PORTS BNC R/A PCB MOUNT RECEPTACLE