

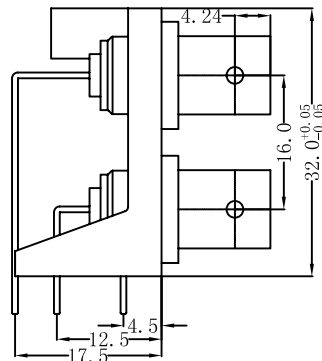
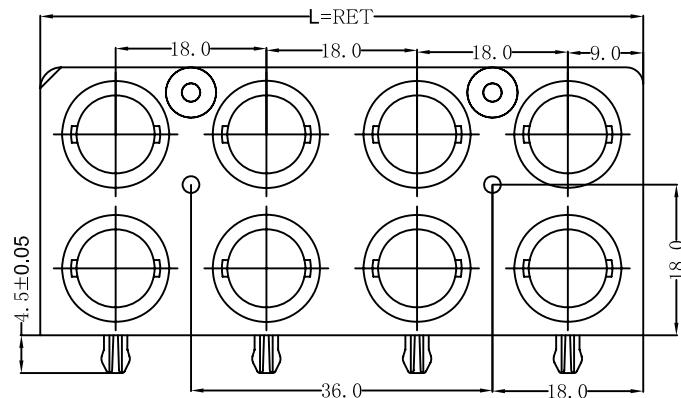
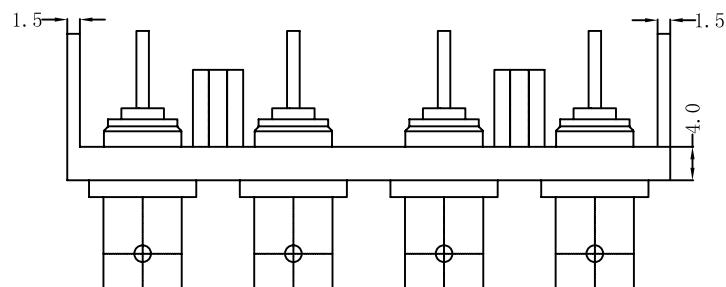


- 1: MATERIALS:  
a: BOOY:ZINC ALLOY,DIE CASTIN NICKEL PLATED  
b: CONTACT:BARS NICKEL FLATED  
c: BRACKET:A.B.S. UL 94HB  
d: INSULATOR: ENGINEER PLASTIC POM VL 94HB  
2: NOMIAL IMPEDENCE 50(75)OHMS.  
3: FREOUENCY RANGE:0-2 GHZ.  
4: MAX PEAK VOLTAGE: 500V  
5: DIELECTRIC STRENGTH WITHSTAND 1.5KV NNS FOR ONE MINUTE  
6: INSULATION RESISTANCE AT 500 VDEC 5000 MEGOHMS MAL.

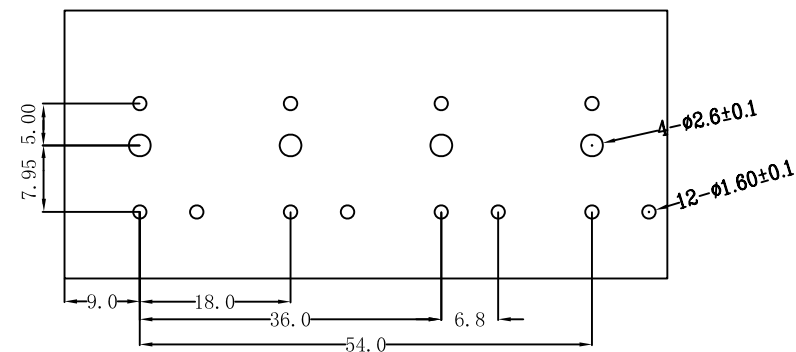

| L=RET |      |
|-------|------|
| 2*1   | 18.0 |
| 2*2   | 36.0 |
| 2*3   | 54.0 |
| 2*4   | 72.0 |

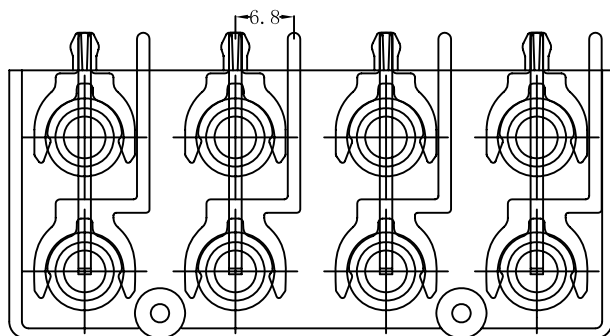

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±



ORDER INFORMATION

**BNCBx-JRE2-xx-LF**  
SERIES  
1:1 PORTS  
2:2 PORTS  
3:3 PORTS  
4:4 PORTS  
LEADFREE  
50 OHM  
75 OHM  
EAR  
DIP 90°  
JACK

DESCRIPTION: