


4	BNC Jack	1	BNC-JC-1855A
3	BELDEN 1855A	1	CAB_Belden 1855Ax172.1
2	HEAT SHRINK TUBE	2	BLACK<内徑6.0>
1	HD-BNC Plug	1	HDBNC-PC-1855A
NO	DESCRIPTION	Q'TY	ITEM #

* 廠內裁切

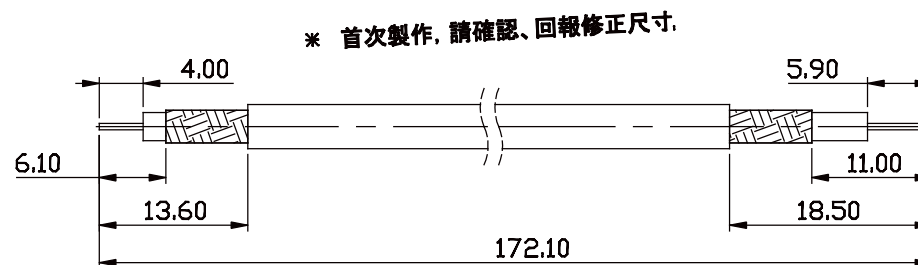

RECOMMEND CABLE STRIPPING

(RoHS Compliant)
Pb ≤ 4 wt%
Cd ≤ 75 ppm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BNCHDBNC-1S1S1855A-A20C-LF

SERIES

ST/ST

LEADFREE
200mm
FEMALE TO MALE
BELDEN 1855A

DESCRIPTION: HD-BNC PLUG-BELDEN 1855A-BNC JACK