


4	BNC Jack	1	BNC-JC-1855A
3	BELDEN 1855A	1	CAB_Belden 1855Ax272.1
2	HEAT SHRINK TUBE	2	BLACK(內徑6.0)
1	HD-BNC Plug	1	HDBNC-PC-1855A
NO	DESCRIPTION	Q'TY	ITEM #

\* 廠內裁切

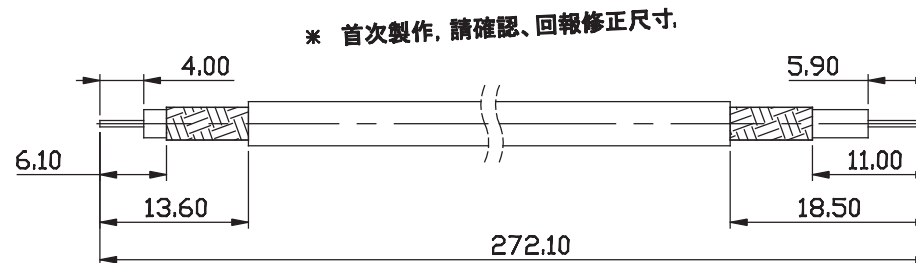

RECOMMEND CABLE STRIPPING

(RoHS Compliant)  
Pb ≤ 4 wt%  
Cd ≤ 75 ppm

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

BNCHDBNC-1S1S1855A-A30C-LF

SERIES

LEADFREE

300mm

FEMALE TO MALE

ST/ST

1855A

DESCRIPTION: HD-BNC PLUG BELDEN 1855A BNC JACK