


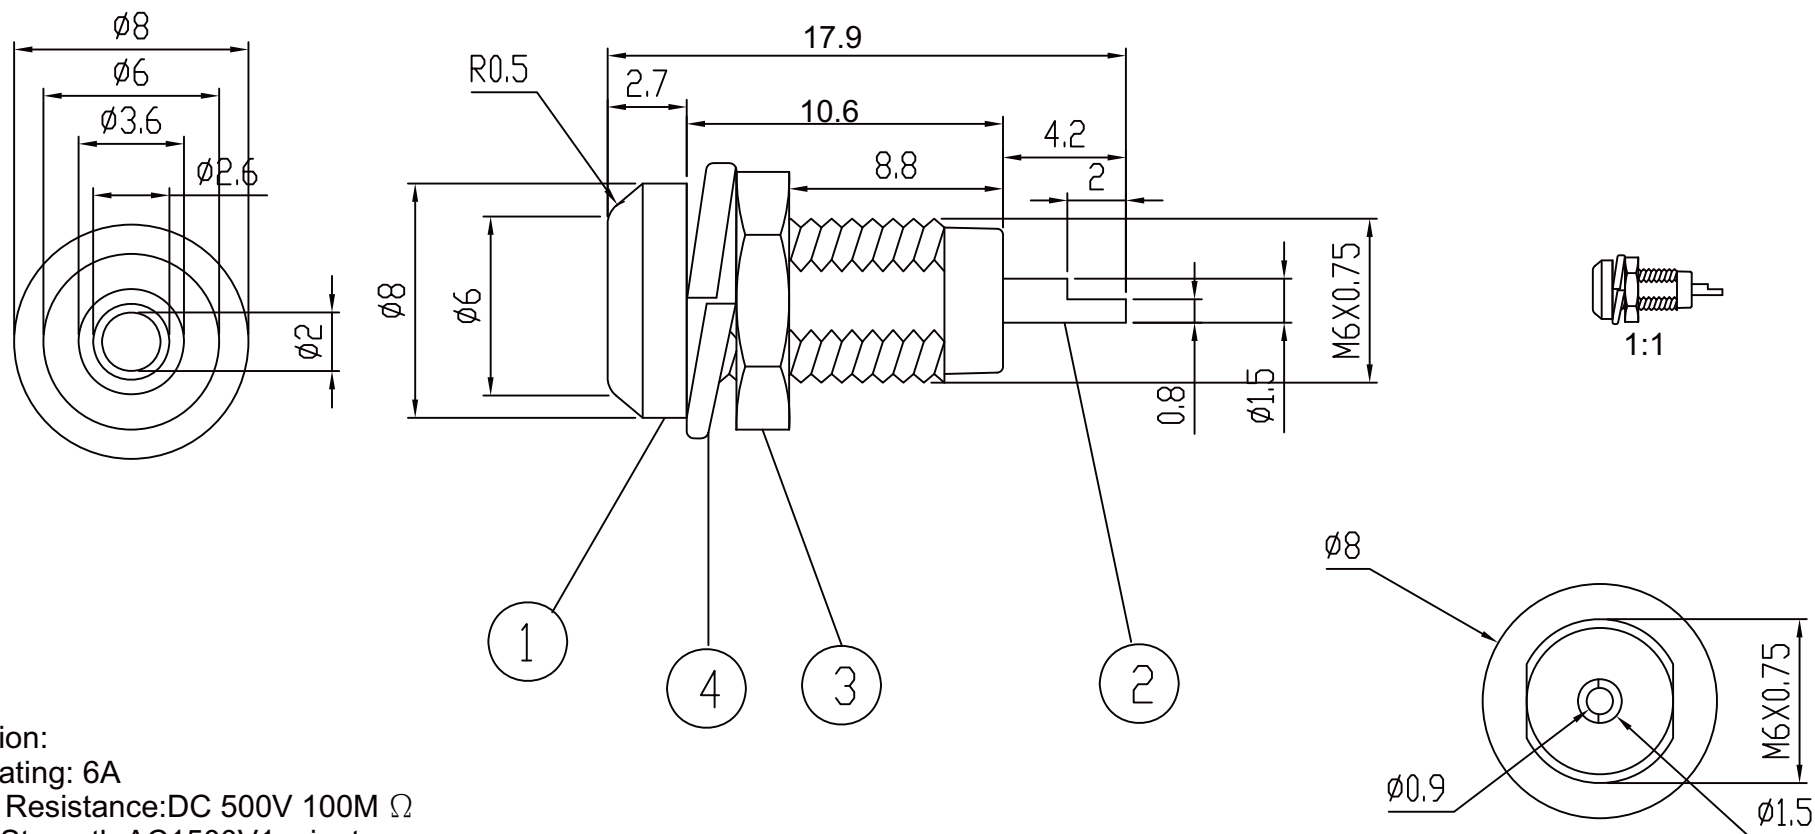

Specification:

Current Rating: 6A

Insulating Resistance:DC 500V 100M Ω

Dielectric Strength:AC1500V1 minute

Available color: red/black/green/blue/yellow

Available plating: Nickel/Gold

No.	Description	Material	Qty
1	HOUSING	PA66BASF	1
2	SOCKET	C2680copper,Nickel/GOLD	1
3	NUT	Steel,Nickel/GOLD	1
4	WASHER	Steel,Nickel/GOLD	1

LEAD < 1000PPM

LEAD OF COPPER ALLOY < 40,000PPM

Cd <1000ppm

Hg <1000ppm

Cr+6 < 1000ppm

PBB < 1000ppm

PBDE < 1000ppm

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 1°

ORDER INFORMATION

BNN2-JSPA17xx-xx-LF

SERIES

JACK

SOLDER

PANEL FRONT

LONG 17.9mm

RD:RED

YL:YELLOW

BL:BLUE

BK:BLACK

GR:GREEN

GD:GOLD

NK:NICKEL

LEADFREE

DESCRIPTION: