


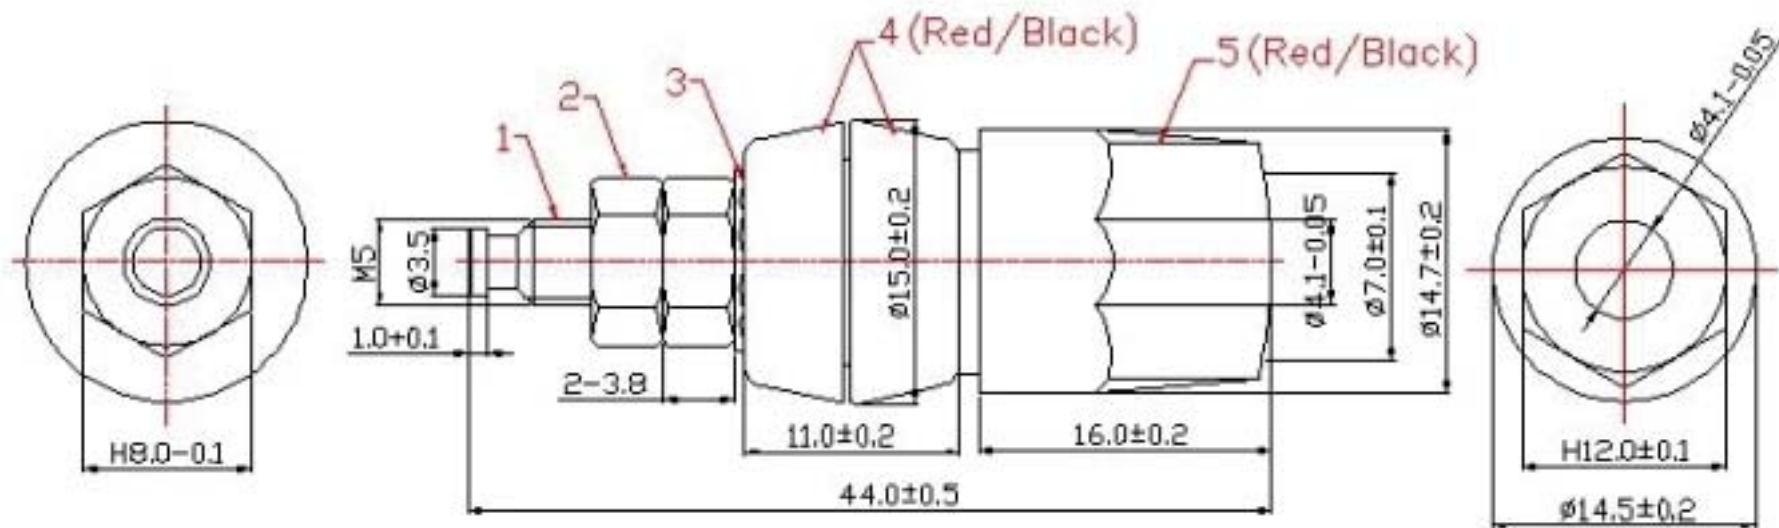

接触电阻：加DC2V/1A电流测量。小于30毫欧。

绝缘电阻：端子与外壳之间加DC500V持续1分钟。测量。

大于100兆欧以上。

耐压：在端子与外壳之间加DC500V持续1分钟测量无击穿现象。

耐温测试：-20℃放置48小时+65℃放置24小时。无变形现象。

5	BACK COVER	ABS
4	PLASTIC HANDLE	ABS
3	LOCK WASHER	Fe
2	NUT	Fe
1	BODY	Cu
ITEM	DESIGNATION	MATERIAL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BNN4-JSPA44-xx-LF

SERIES

LEADFREE

RD: RED
BK: BLACK

JACK
SOLDER
PANEL FRONT
LONG 44mm

DESCRIPTION: