


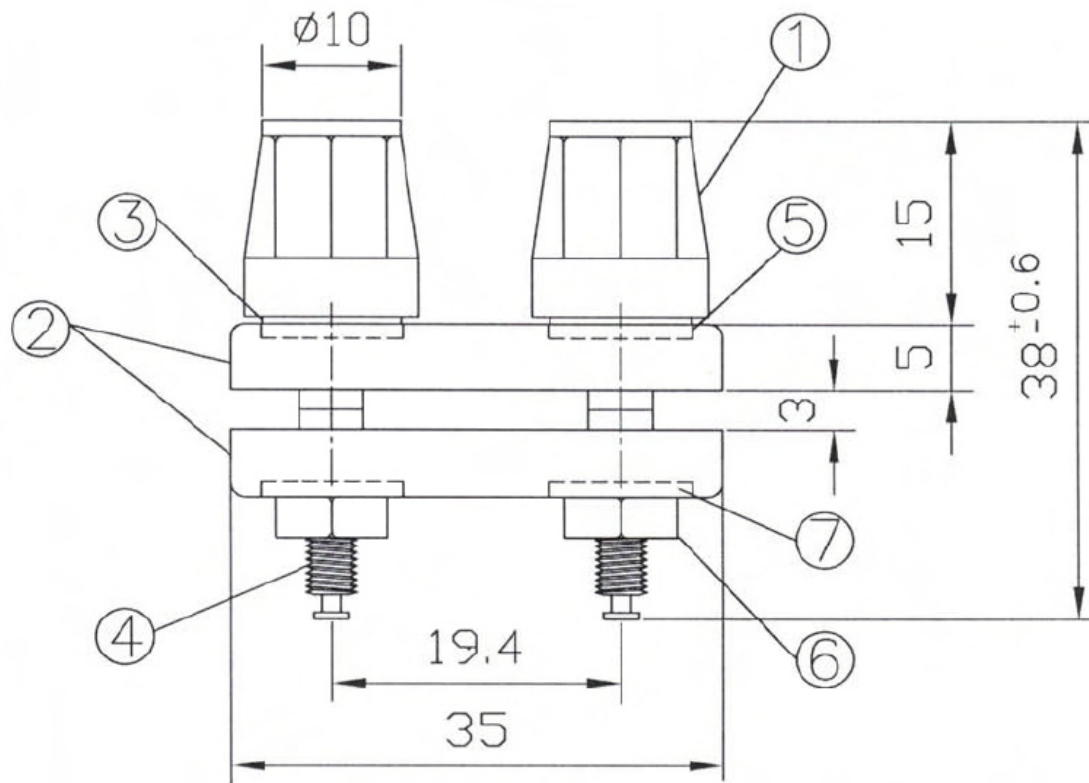

SPECIFICATION

- 1.RATING : 15A/250VAC , 125VAC
- 2.INSULATION RESISTANCE : DC 500V 100Mohm Min
- 3.VOLTAGE BREAKDOWN : AC 1000V 1 minute

7	WASHER	2	SPC	Ni	ø4.3Xø10X0.8t
6	NUT	2	SPC	Ni	M4XP0.7 7X3t
5	PLATE	2	BRASS	Ni	
4	SCREW SHAFT	2	BRASS	Ni	
3	HEAD	2	BRASS	Ni	
2	FIXED HOUSING	2	ABS PA-756 94V-0	BLACK	
1	KNOB	2	ABS PA-756 94V-0	RED,BLACK	
NO.	DESCRIPTION	QTY	MATERIAL	SPECIFICATION	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BNN4A2-JSPA-38-LF

SERIES

LEADFREE
38mm LONG
PANEL FRONT
SOLDER
JACK

DESCRIPTION: