

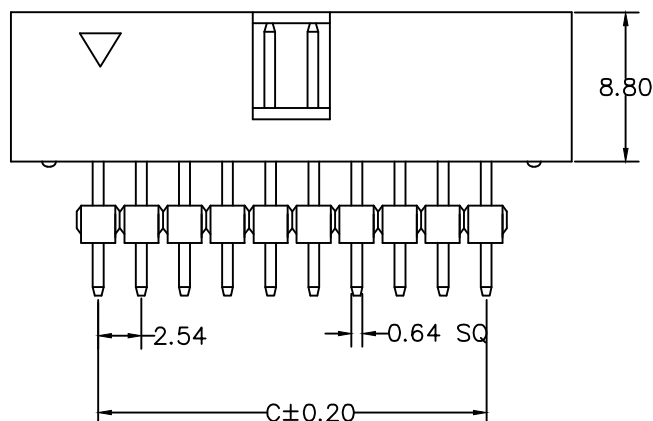


Number Of Position	DIMENSIONS		
	A	B	C
06	15.24	12.94	5.08
08	17.78	15.48	7.62
10	20.32	18.02	10.16
12	22.86	20.56	12.70
14	25.40	23.10	15.24
16	27.94	25.64	17.78
20	33.02	30.72	22.86
24	38.10	35.80	27.94
26	40.64	38.34	30.48
30	45.72	43.42	35.56
34	50.80	48.50	40.64
40	58.42	56.12	48.26
44	63.50	61.20	53.34
50	71.12	68.82	60.96

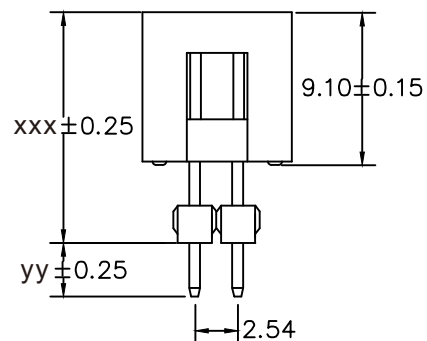

P. C. B LAYOUT

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -25°C TO +105°C

DIELECTRIC WITHSTANDING : AC 500 V

CONTACT RESISTANCE : 20 MOHM MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BS-Dxxxxy-xx-LF
SERIES
DIP 180°
LEADFREE
06~50 WAY
23:DIP 2.3mm
44:DIP 4.4mm
116:HIGH 11.6mm
127:HIGH 12.7mm

DESCRIPTION: