

## MATERIAL

INSULATION: HEAT-SHRINK TUBE

MATERIAL: COPPER TUBE

TIN PLATING


### MAXIMUM ELECTRIC CURRENT

A. W. G	26	24	22	20	18	16	14	12	10	8
MAX AMP	5.5	7	9	12	17	18	30	35	50	70

WIRE RANGE AWG/mm <sup>2</sup>	產品編號 ITEM NO.	L ±2.00	d ±0.30	t ±0.05
26-22 AWG 0.1-0.5 mm <sup>2</sup>	BST-HT-22	24.0	1.0	0.4
22-16 AWG 0.5-1.5 mm <sup>2</sup>	BST-HT-16	37.0	1.6	0.75
16-14 AWG 1.5-2.5 mm <sup>2</sup>	BST-HT-14	37.0	2.3	0.8
12-10 AWG 4-6 mm <sup>2</sup>	BST-HT-10	41.0	3.6	0.9
WIRE RANGE AWG/mm <sup>2</sup>	產品編號 ITEM NO.	L ±2.00	d ±0.30	t ±0.08
8 AWG 8 mm <sup>2</sup>	BST-HT-08	42.0	4.5	1.1

### NOTE:

1. MAXIMUM ELECTRICAL RATING: 600 VOLTS
2. SHRINK TEMP: 150°C  
OPERATING TEMP: -10°C ~ 105°C
3. WIRE RANGE: 26-22 AWG / 0.1-0.5 mm<sup>2</sup>
4. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm<sup>2</sup>
5. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm<sup>2</sup>
6. WIRE RANGE: 12-10 AWG / 4-6 mm<sup>2</sup>
7. WIRE RANGE: 8 AWG / 8 mm<sup>2</sup>
8. MATERIAL THICKNESS: t

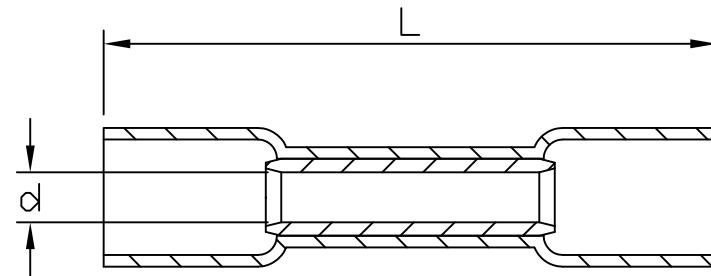

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

BST-HT-xx-LF  
SERIES | LEADFREE  
22:22-26 AWG  
08:8 AWG  
HEAT SHRINK TUBE

DESCRIPTION: