


MAXIMUM ELECTRIC CURRENT

A. W. G	26	24	22	20	18	16	14	12	10
MAX AMP	5.5	7	9	12	17	18	30	35	50

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS
2. WIRE RANGE: 26-22 AWG / 0.1-0.5 mm²
INSULATED COLOR: YELLOW
3. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
4. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
5. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
6. MATERIAL THICKNESS: t
TOLERANC: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	L ±1.00	d ±0.30	D ±0.50	t
26-22 AWG 0.1-0.5 mm ²	BST-N-22	20.0	1.0	2.3	0.4
22-16 AWG 0.5-1.5 mm ²	BST-N-16	26.0	1.6	4.1	0.75
16-14 AWG 1.5-2.5 mm ²	BST-N-14	26.0	2.3	4.8	0.8
12-10 AWG 4-6 mm ²	BST-N-10	28.0	3.6	6.5	0.9

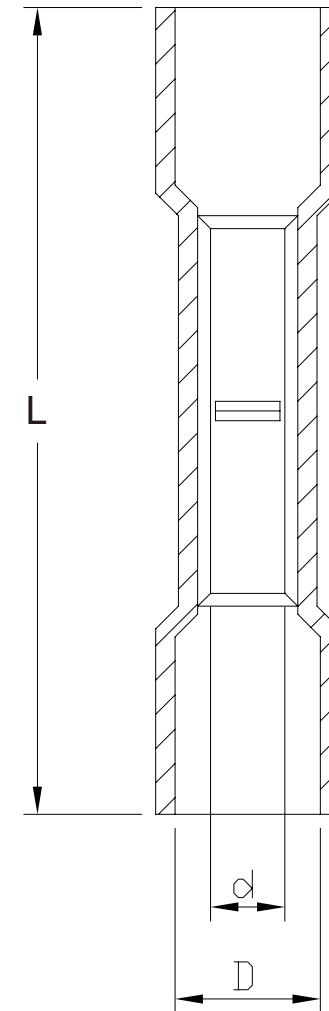

MATERIAL

INSULATION: NYLON

MATERIAL: COPPER TUBE

TIN PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BST-N-xx-LF
SERIES | LEADFREE
10:10-12 AWG
NYLON

DESCRIPTION: