
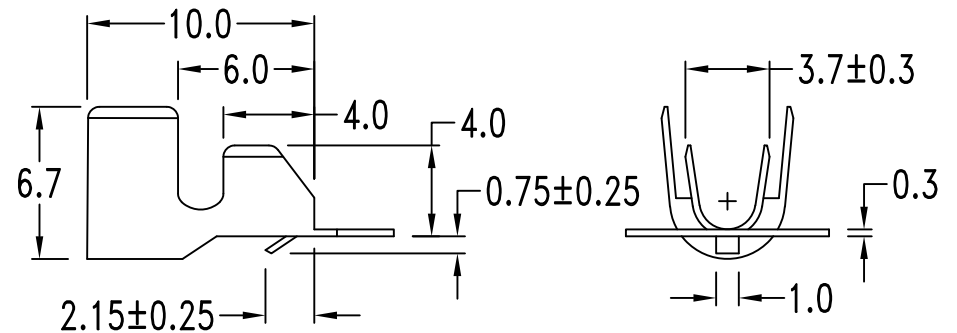


Features:

- Secures wire to P.C. board before wave soldering
- Rapid and economical means of hand wiring P.C. boards
- Wire solders directly to P.C. board
- No additional contact resistance
- Low profile
- Recommended P.C. board hole diameter $\varnothing 3.2 \begin{matrix} + 0.1 \\ - 0 \end{matrix}$ mm
- Applicable P.C. board thickness: 1.6mm
- Wire range: #18 ~ #22 AWG bundle wire, #18 AWG x 4 Max.
- A maximum protrusion below the P.C. board of 2.2mm
- Tin-plated brass
- Roll Form package
- Quantity: 2000 PCS/Reel

Specifications:

- Current rating: 10A
- Voltage rating: 250V AC, DC
- Crimp resistance: $20\text{m}\Omega$ max.
- Ambient temperature range: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$

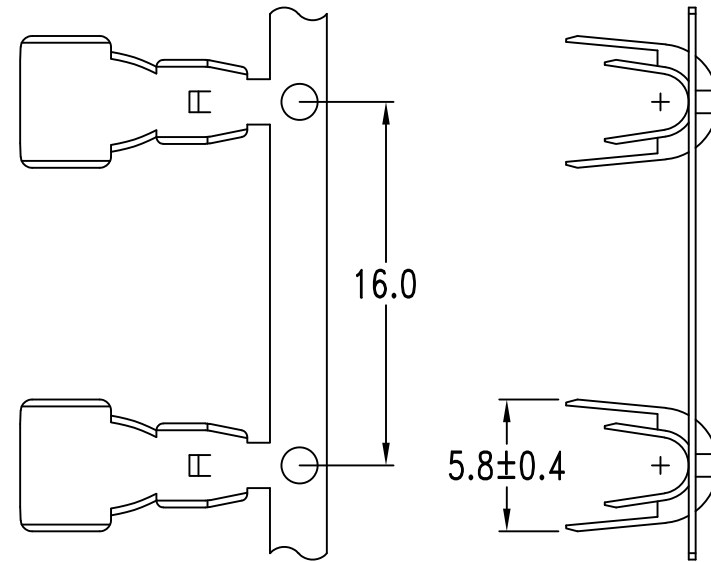

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.10
ANG ±

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PJECTION

照片框

ORDER INFORMATION

BT-D32-18-LF
SERIES LEADFREE
18 AWG
PCB HOLE 3.2mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Multiple-Crimp Stand-Alone Board-In type