Valtage Rating: 200V DC
Current Rating: 250A DC per contact
Contact Resistance: 100 milliohms maximum(includes 75mm cordage).20 milliohms maximum rise after test
Insulation Resistance:100 megohms minimum at 50V DC
Robustness of Termiantion:50N (Newtons) minimum.

Features:
- ☐ 4&6way
- ☐ Locking lance On right or left
- ☐ Insulation piercing contact method
- ☐ Terminates cables upon CW 1311 specification
- ☐ Selective gold plating

Specifications
Housing :Unfilled polyester ,white
Material Contact:Phosphor Bronze
Plating.1.27um/50uinch gold in contact area over 1.27um/50 uinch nickel
Insertion Force(latch Inoperative) :4 way 10N maximum.6 way 15N maximum
Withdrawal Force(unlatched):4 minimum.6 way 15N maximum. 2N maximum

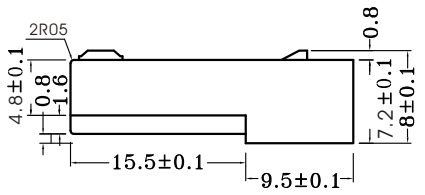

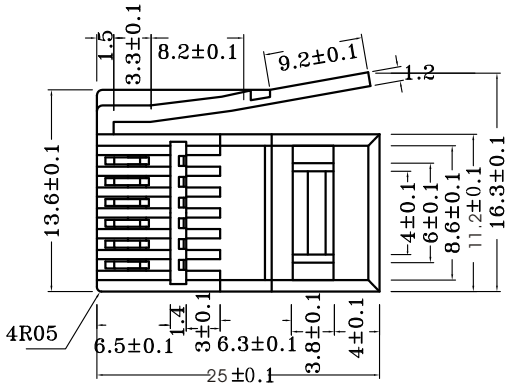

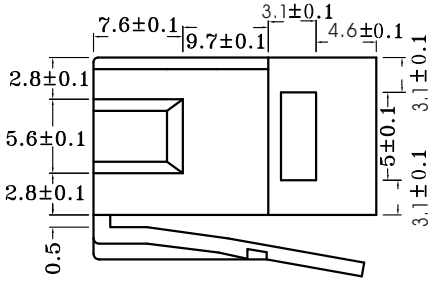

MORETHANALL CONNECTORS ASSEMBLIES	PART NO. BT-P-0606							
	DWG NO. BT-P-0606	APPROVED BY CY	TOLERANCES ARE .X .XX .XXX AWG	DESCRIP TION:	BRITISH MODULAR PLUG			
煜倫有限公司	FILE NO.	DRAWING BY						
	UNIT / mm	SCALE 1:1	PROJECTION	AREA	REVISIONS	HK	DATE	