
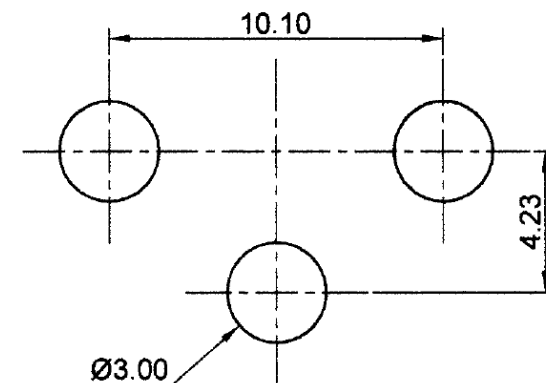
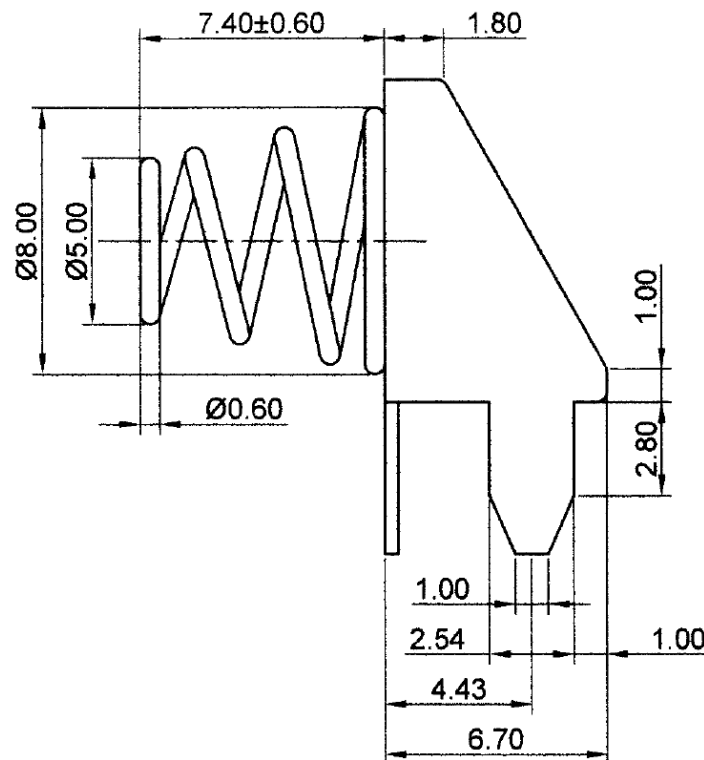


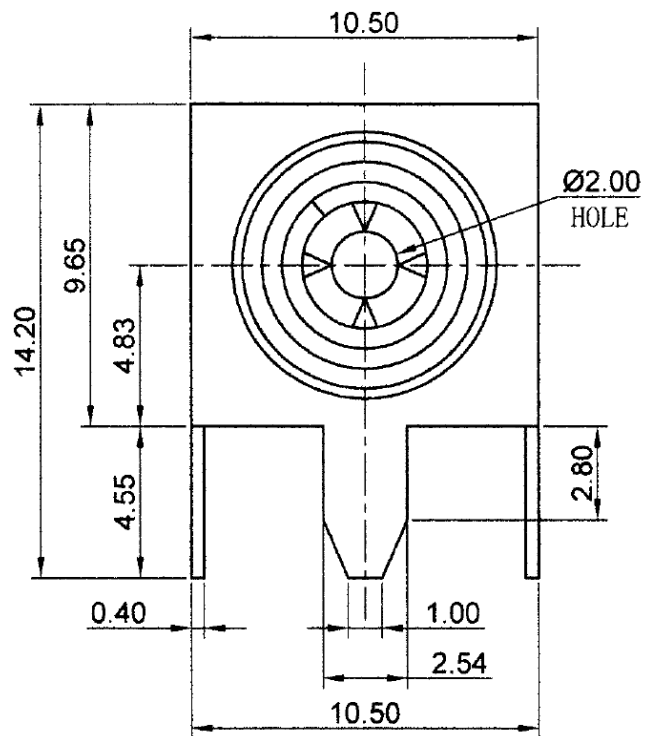

PCB Mounting Layout

NOTES

- (1) MATERIAL: 0.4MM THICK FERRUM NICKEL PLATED
- (2) SPRING: Ø0.6MM 65C SPRING STEEL NICKEL PLATED
EFFECTIVE NUMBER OF TURNS 4
- (3) PROCESS CORNER R=0.40MM
- (4) SURFACE NO BURRS, NO GREASE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

BTC-DCS-AA-LF
SERIES | T | LEADFREE
AA TYPE
CONTACT SPRING
DIP

DESCRIPTION: