
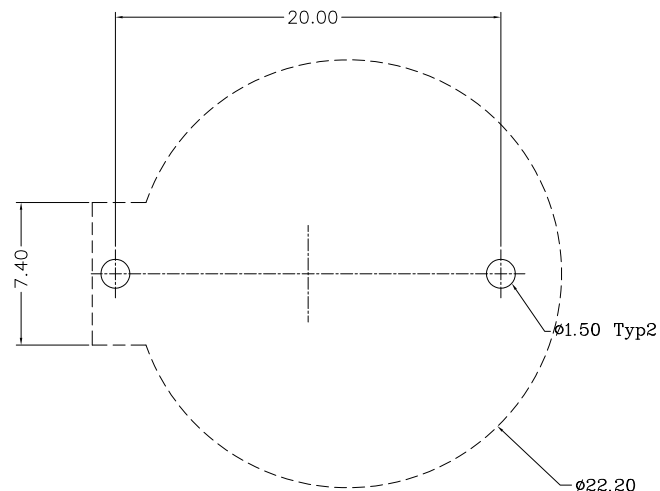
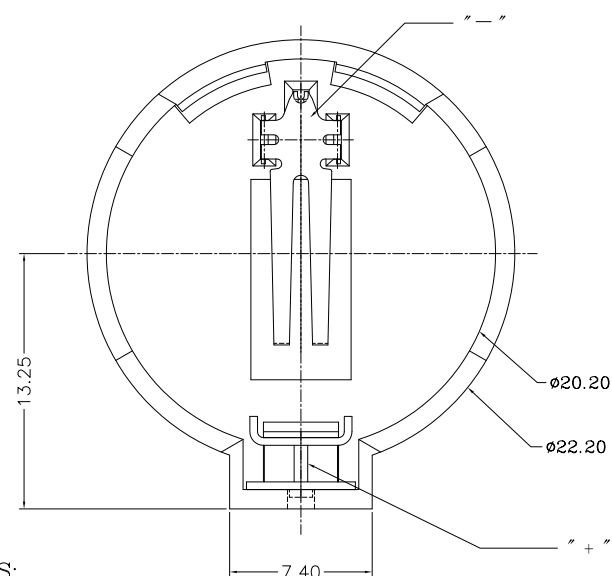
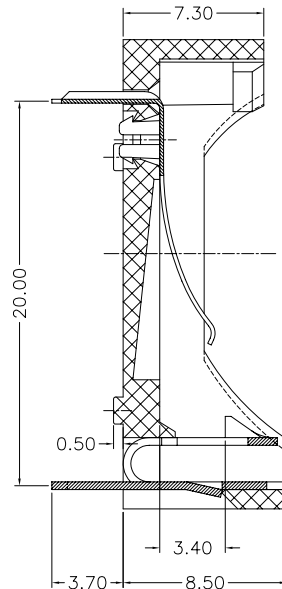


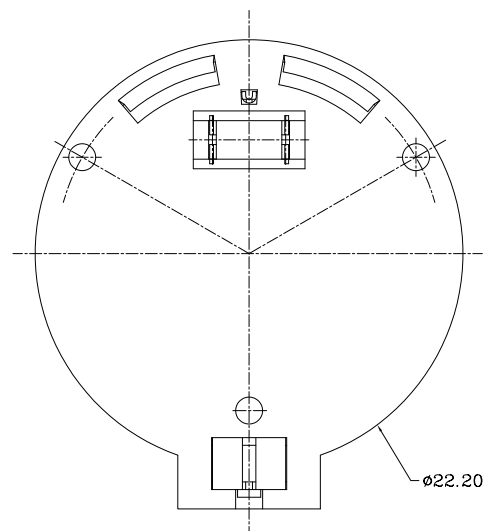

P.C. BOARD LAYOUT

NOTES:

*Material

Body:FR-Nylon With 33 % Glass
Filld UL 94V-0 Rated.

Contact:Phosphor Bronze

*Finish

Contact:Tin Plated Over Nickel or Copper.

*Specification

Application For 3V Lithium Battery
Insulator Tor Resistance:5000 Megaohms Min
Operation Temperature:-55 °C To +105 °C
Durability:50 Cycles Min
Contact Resistance:30 Milliohms.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

BTH-D85-20-LF

SERIES | LEADFREE
FOR CR2032
HIGH 8.5mm
DIP 180°

DESCRIPTION: Battery Housing Standard Typ