



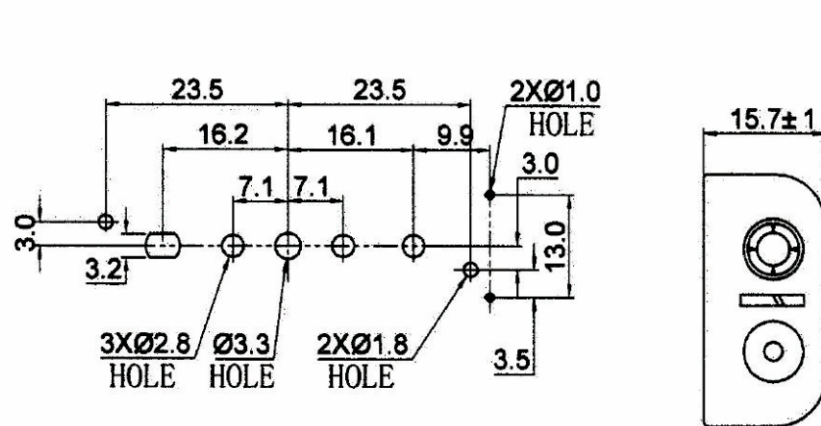


PCB/MOUNTING LAYOUT

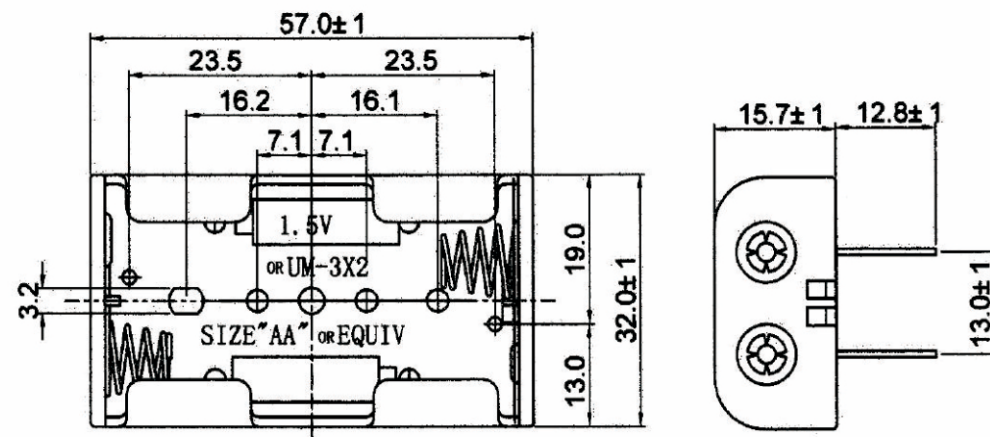

SPECIFICATION

- (1) MATERIAL: P. P. RESIN, BLACK COLOR
- (2) WITH PIN: Ø0.8X24MM, BRASS NICKEL PLATED
- (3) SPRING: 0.6MM 65C SPRING STEEL
NICKEL PLATED
- (4) RIVET: BRASS NICKEL PLATED
- (5) RoHS COMPLIANT

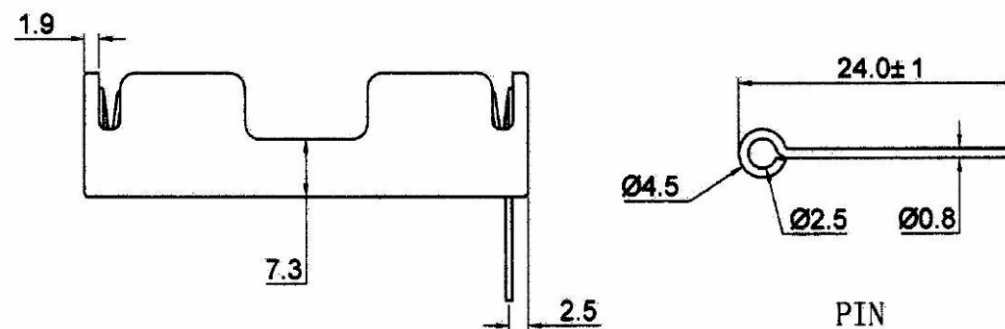

PIN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

BTH-DP-2AA9-LF

SERIES LEADFREE

2AA9 TYPE

POST
DIP 180°

DESCRIPTION: