
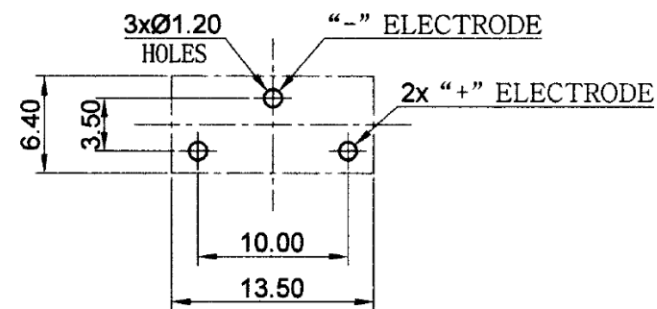
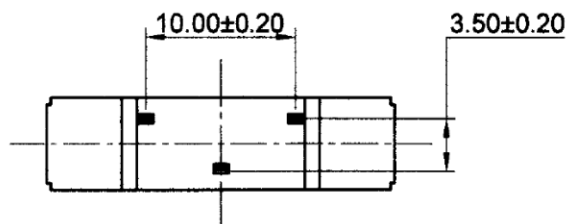
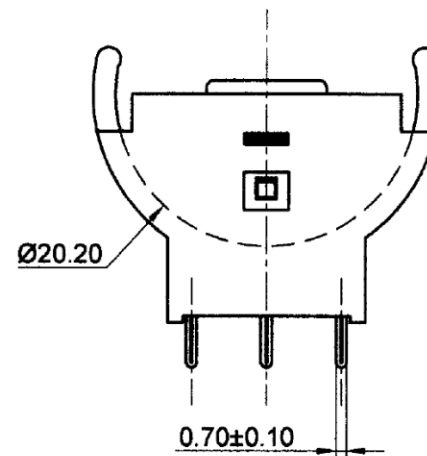
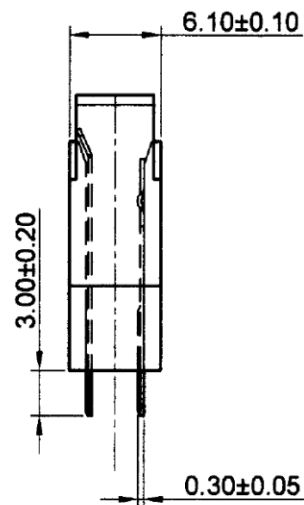


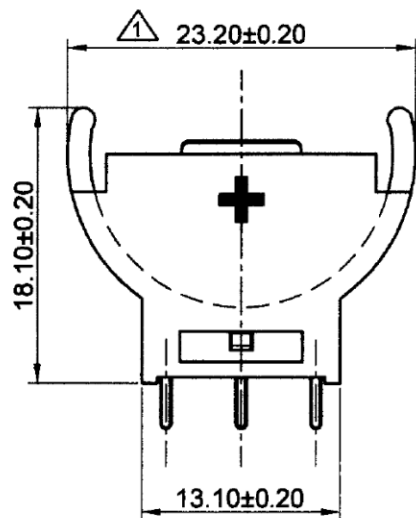

PCB MOUNTING LAYOUT

SPECIFICATION

- (1) HOUSING MATERIAL: NYLON66+30%GF UL94V0 BLACK COLOR
- (2) CONTACT MATERIAL: PHOSPHOR BRONZE 0.25MM THICK NICKEL PLATED
- (3) CURRENT RATING: 3.0A (AC/DC)
- (4) VOLTAGE RATING: 500V (AC/DC)
- (5) CONTACT RESISTANCE: 30 MILLIOHMS
- (6) INSULATION RESISTANCE: 1000 MEGAOHMS
- (7) TEMPERATURE RANGE: -55℃ TO +85℃
- (8) HUMIDITY: 40℃ AND 90~95% RH FOR 96 HOURS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

BTH-U2-20-LF
SERIES T LEADFREE
CR 2032
U TYPE

DESCRIPTION: