

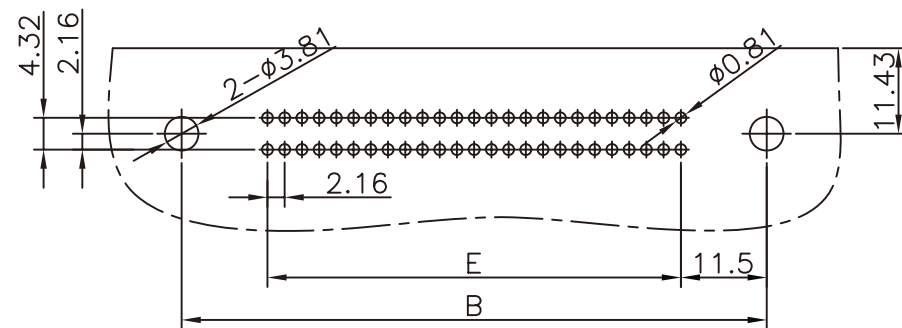
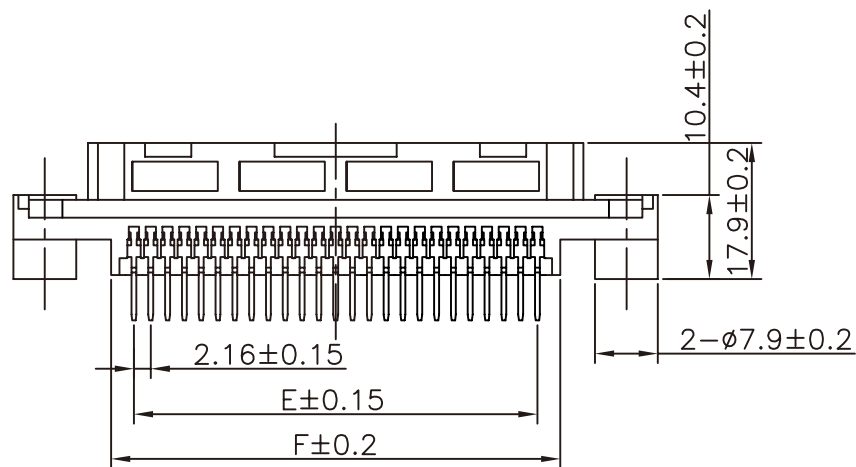


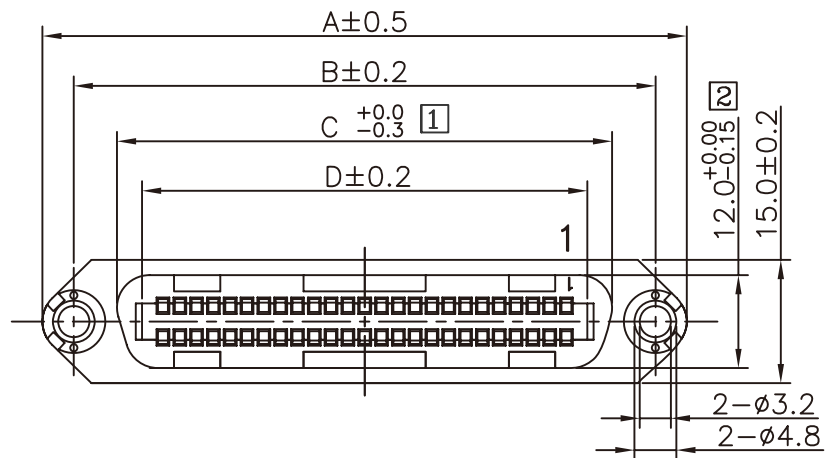

Material:
Housing: Thermoplastic, UL94V-0.
Contact: Phosphor Bronze,
Selective Gold over Nickel.

Electrical Characteristics:
Current Rating: 1A DC/Max.
per contact pair 1A/Max.
for simultaneous current on all contacts.
Contact Resistance: 25mΩ/Max.
Dielectric Withstanding Voltage: AC 1000V
Insulation Resistance: 1000MΩ/Min.
Temperature Range: -55°C to +125°C

Contact	Dimensions					
	A	B	C	D	E	F
14	44.15	35.95	25.38	18.12	12.96	19.62
24	54.95	46.75	36.18	28.92	23.76	30.42
36	67.91	59.71	49.14	41.88	36.72	43.38
50	83.03	74.83	64.26	57.00	51.84	58.50
64	98.15	89.95	79.38	72.12	66.96	73.62

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.30
.XXX ± 0.20
ANG ±

照片框

ORDER INFORMATION

CDP-S-xx-LF
SERIES T LEADFREE
14-64 WAY
FEMALE

DESCRIPTION: CENTRONIC P.C.B S/T TYPE FEMALE ALL PLASTIC