


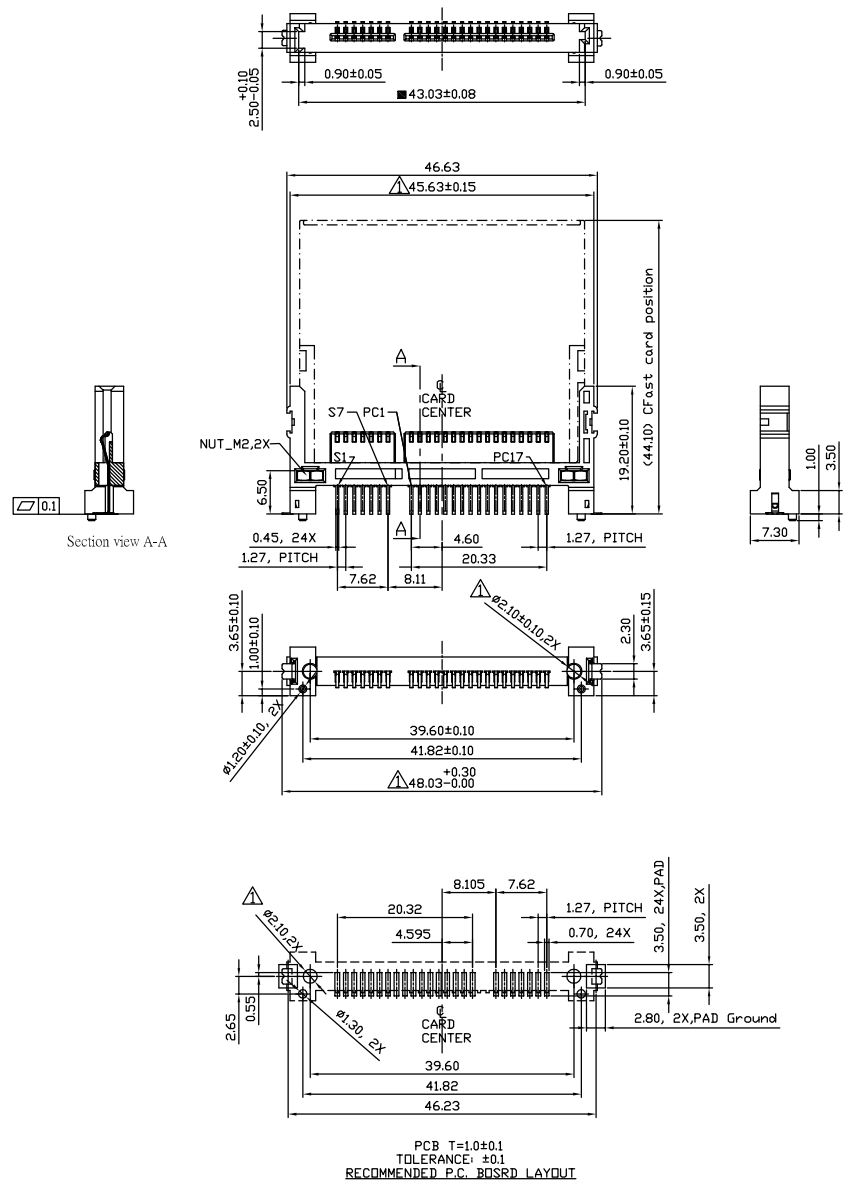

NOTES: 1. MATERIAL:

1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.

1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t

2. PLATING:


2-1 CONTACTS: 0.762 μ m (30 μ ") gold plating in contact area.and 2.54 μ m (100 μ ") min.

matte Tin in soldering zone, over entire contact underplated with 1.27 μ m (50 μ ") min. Nickel over all.

2-2 Solder zone: 2.54 μ m (100 μ ") matte Tin, 1.27 μ m (50 μ ") min. Nickel underplating over all.

3. RoHS compliant products.

4. OPERATING TEMPERATURE: -40°C~+85°C

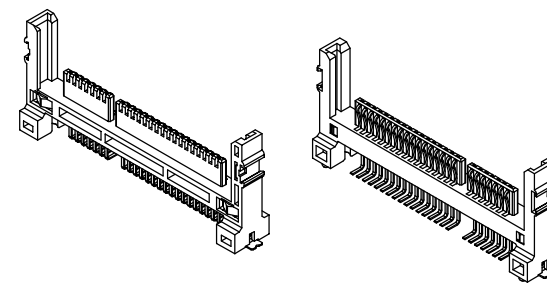

照片框

ORDER INFORMATION

CFA-PV41BE001-24-LF
SERIES T T T T LEADFREE
MALE 24WAY
180°SMT B TYPE NORMAL
POST TO POST 41.82mm

DESCRIPTION: Cfast host_Stand 0ff

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION