
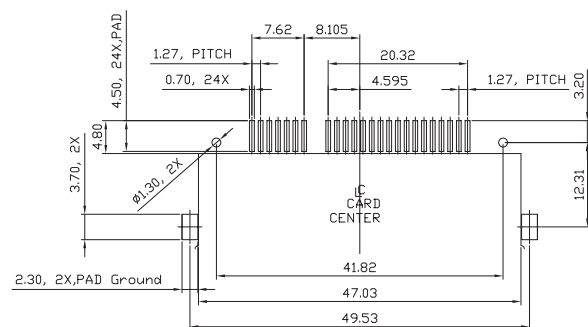


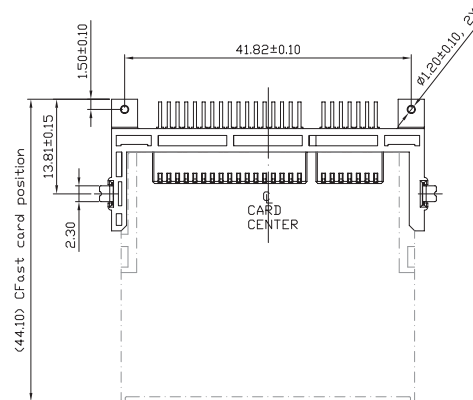



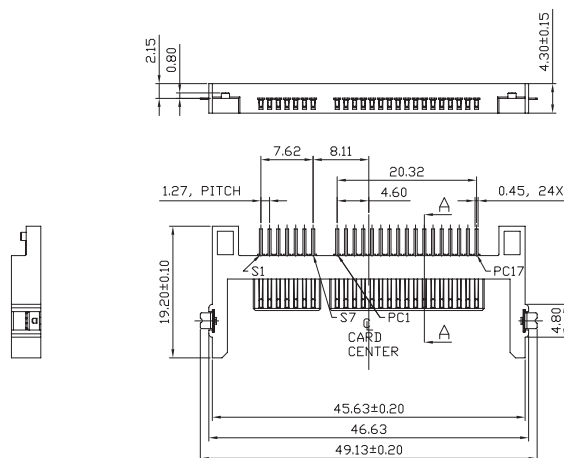

TOLERANCE: ±0.05
RECOMMENDED P.C. BOARD LAYOUT

NOTES: 1. MATERIAL:

1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.

1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t

2. PLATING:

2-1 CONTACTS: 0.25 μ m (10 μ ") gold plating in contact area.and 2.54 μ m (100 μ ") min.

matte Tin in soldering zone, over entire contact underplated with 1.27 μ m (50 μ ") min. Nickel over all.

2-2 Solder zone: 2.54 μ m (100 μ ") matte Tin, 1.27 μ m (50 μ ") min. Nickel underplating over all.

3. RoHS compliant products.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CFA-PW41AE002F-24-LF
SERIES | | | | | LEADFREE
MALE | | | | | 24WAY
90°SMT | | | | | FLANGE
POST TO POST 41.82mm | | | | | RVS
A TYPE | | | | | STANDOFF 0.0mm
EAR

DESCRIPTION: Cfast host_4.3H 簡易型 (短腳破板2)