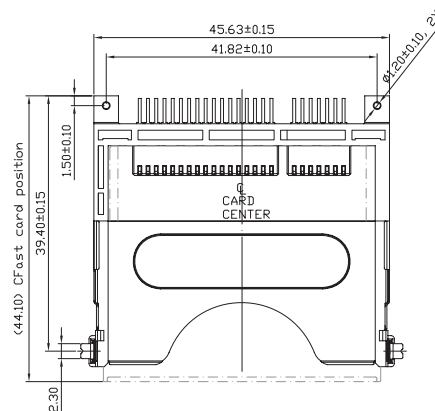
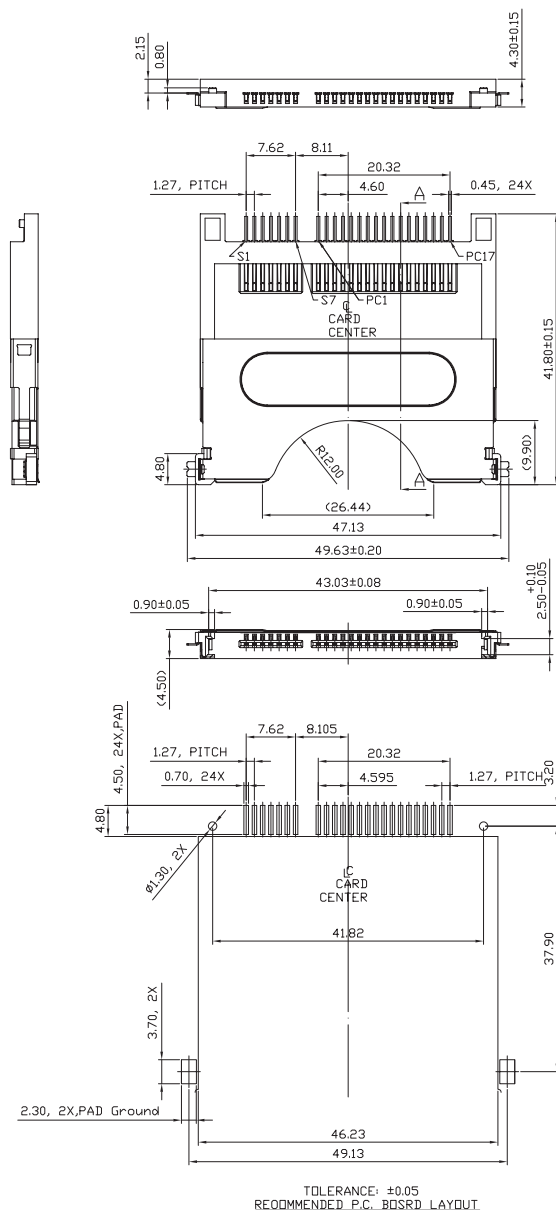


NOTES:

1. MATERIAL:

- 1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.
- 1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
- 1-3 Metal cover : SUS304 0.2t.

2. PLATING:

- 2-1 CONTACTS: 0.25 μ m (10 μ ") gold plating in contact area, and underplated with 1.27 μ m (50 μ ") min. Nickel over all.
- 2-2 Solder zone: 2.54 μ m (100 μ ") matte Tin, 1.27 μ m (50 μ ") min. Nickel underplating over all.

3. RoHS compliant products.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CFA-PW41AE002FL-24-LF
SERIES | | | | | LEADFREE
MALE | | | | | 24WAY
90°SMT | | | | | FLANGE LOCK
POST TO POST 41.82mm | | | | | STANDOFF 0.0mm
A TYPE | | | | | EAR

DESCRIPTION: Cfast host_4.3H 簡易型 (長腳破板2)