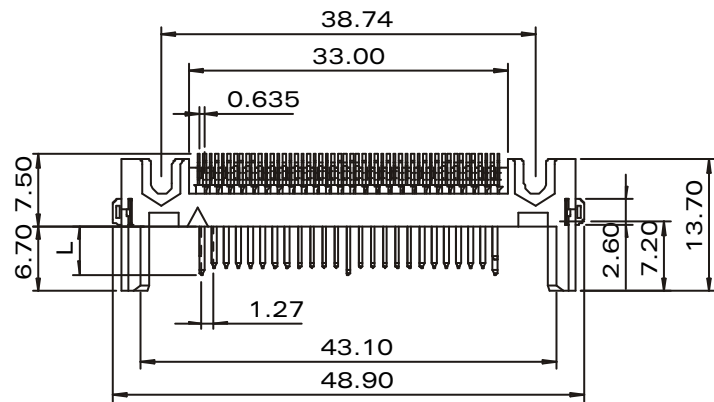


NOTES:




1. MATERIAL :

INSULATOR : HIGH TEMPERATURE
THERMOPLASTIC
FLAMMABILITY RATING : UL94V-0
CONTACT : COPPER ALLOY
GROUND MOUNT EAR : COPPER ALLOY

2. PLATING :

CONTACT AREA : GOLD
UNDER PLATING : NICKEL OVERALL
SOLDER TAIL AREA : TIN/LEAD
GROUND MOUNT EAR AREA : TIN/LEAD

3. SOLDER TAIL TO BE WITHIN 0.05 UPWARD
AND 0.2 DOWNWARD FROM Z-DATUM PLACE,
AND COPLANARITY OF SOLDER TAILS TO BE
WITHIN 0.12

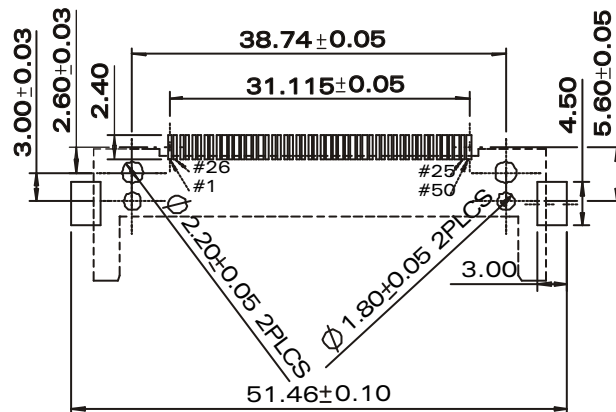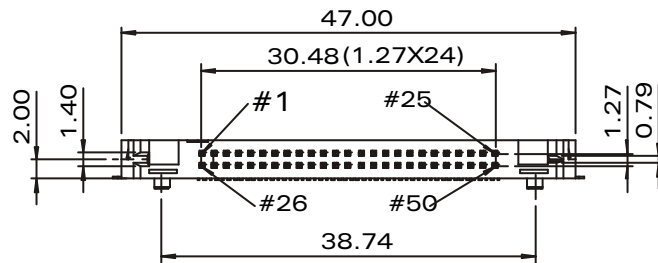

RECOMMENDED P.C.B PATTERN

PIN NUMBER	DIM L ±0.10
25 , 26	3.50
ALL OTHER PINS	4.25
1 , 13 , 38 , 50	5.00

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CFC-PW38BE001L7-50

DWG NO. CFC-PW38BE001L7-50

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司