


NOTE:
 1.MATERIAL:
 HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 COLOR: SEE PART NO.
 CONTACTS: COPPER ALLOY.
 HOLDDOWN: COPPER ALLOY.
 2.CONTACT:
 CONTACT: SELECTIVE GOLD PLATING ON CONTACT AREA
 TIN PLATING ON SOLDER TAILS
 NICKEL UNDERPLATED OVERALL.
 HOLDDOWN: TIN PLATING WITH NICKEL UNDERPLATED OVERALL

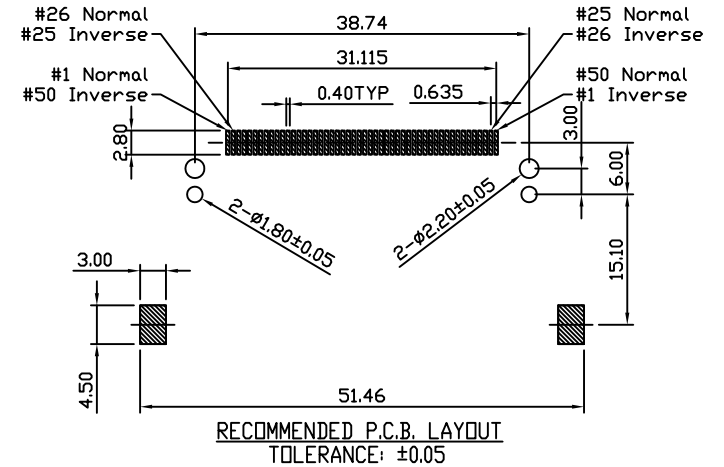

Pin Type	Interface Dim.	Pin No.
Detect	3.50mm (0.138in)	25,26
General	4.25mm (0.167in)	The Others
Power	5.00mm (0.197in)	01,13,38,50

±0.10

Type	DIM A	DIM B
Normal	1.40mm	0.79mm
Inverse	0.79mm	1.40mm

±0.05

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

CFC-PW38BE011-50-LF

SERIES | | | | | LEADFREE

MALE | | | | | 50WAY

90°SMT | | | | | NORMAL

POST TO POST 38.74mm | | | | | STANDOFF 1.45mm

| | | | | EAR B TYPE

DESCRIPTION: CF Connector (POST 38.74mm STANDOFF 1.45mm)