

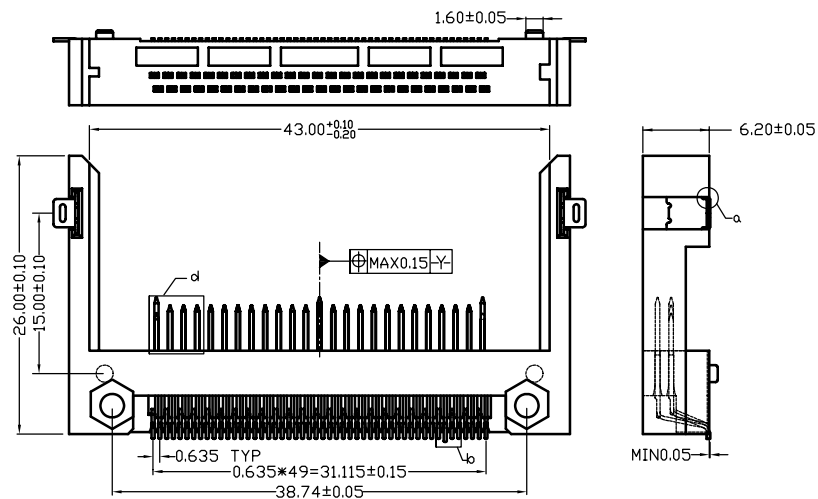


NOTES :


- MATERIAL :
INSULATOR : LCP
COLOR : YELLOW(BLACK)
CONTACT : BRASS
MOUNT EAR : BRASS
- PLATING :
CONTACT AREA : GOLD FLASH,5U" GOLD,15U" GOLD
UNDER PLATING : NICKEL OVERALL
SOLDER TAIL AREA : TIN
MOUNT EAR AREA : TIN
- SOLDER TAIL TO BE WITHIN 0.02 UPWARD AND DOWNWARD FROM Z-DATUM PLACE , AND COMPANARITY OF SOLDER TAIL TO BE WITHIN 0.10

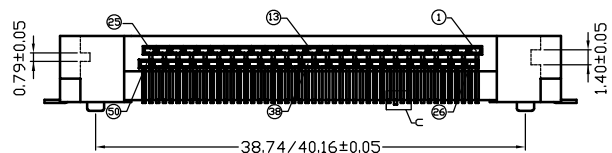

UPPER BOARD

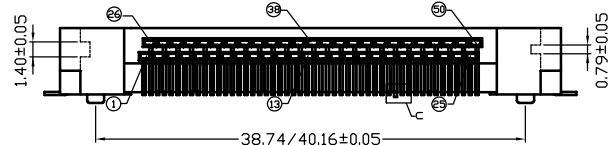

LOWER BOARD

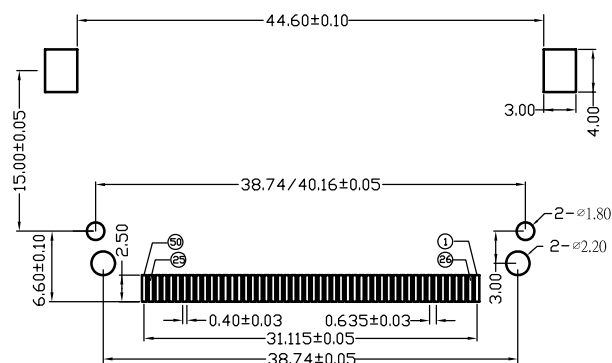

RECOMMENDED UPPER BOARD P.C.B LAYOUT

PIN NUMBER	DIM.L
25 26	3.50
ALL OTHER PINS	4.25
1 13 38 50	5.00

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.05
.XX ± 0.02
.XXX ± 0.002
ANG ± 1°

ORDER INFORMATION

CFC-PW38BE111-50-LF
SERIES
MALE
90°SMT
POST TO POST 38.74mm
TYPE 1
EAR
B TYPE
LEADFREE
50WAY
NORMAL
STANDOFF 1.7mm

DESCRIPTION: