

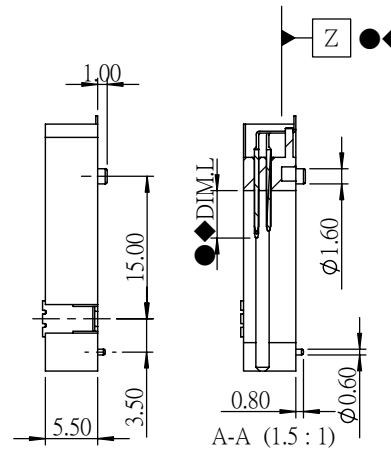


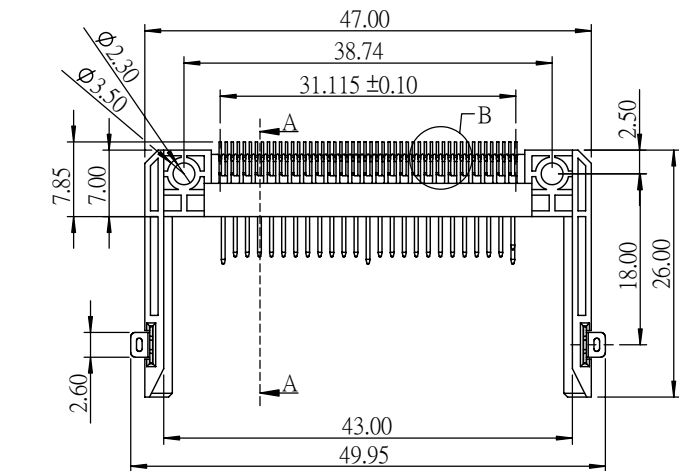


NOTE:

1. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDER TAILS TO BE WITHIN 0.12. MEASUREMENT POINT IS SOLDER TAIL TIP.
2. INSPECTION SYMBOL:
 ● : MANUFACTURER INSPECTION
 ◆ : Q.C INSPECTION
3. PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.

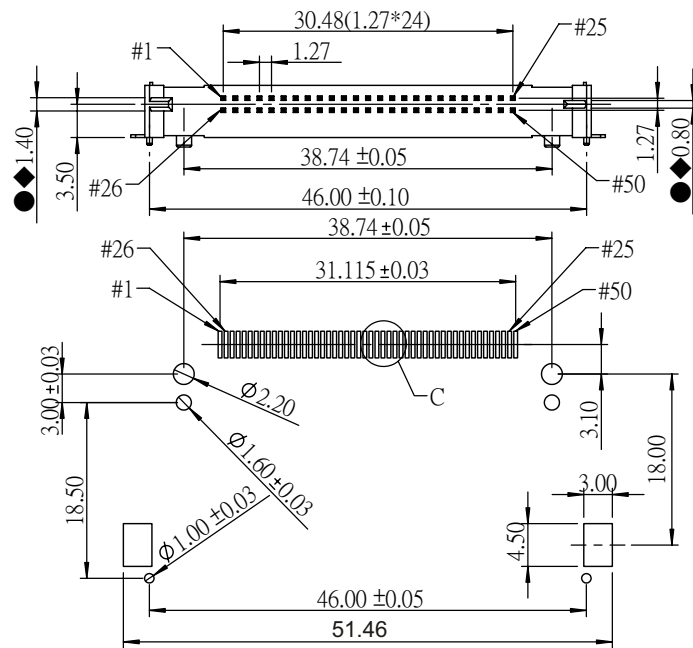


PCB LAYOUT : COMPONENT SIDE

◆ 0.635 ±0.10



B (3 : 1)



C (5 : 1)

TABLE 1

DIM. L ±0.20	PIN NUMBER
3.50 mm	25, 26
4.25 mm	THE REST
5.00 mm	1, 13, 38, 50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

CFC-PW38CE101-50-LF

SERIES | | | | | LEADFREE
 | | | | | 50WAY
 MALE | | | | | NORMAL
 90°SMT | | | | | TYPE 1
 POST TO POST 38.74mm | | | | | EAR
 | | | | | C TYPE

DESCRIPTION: