


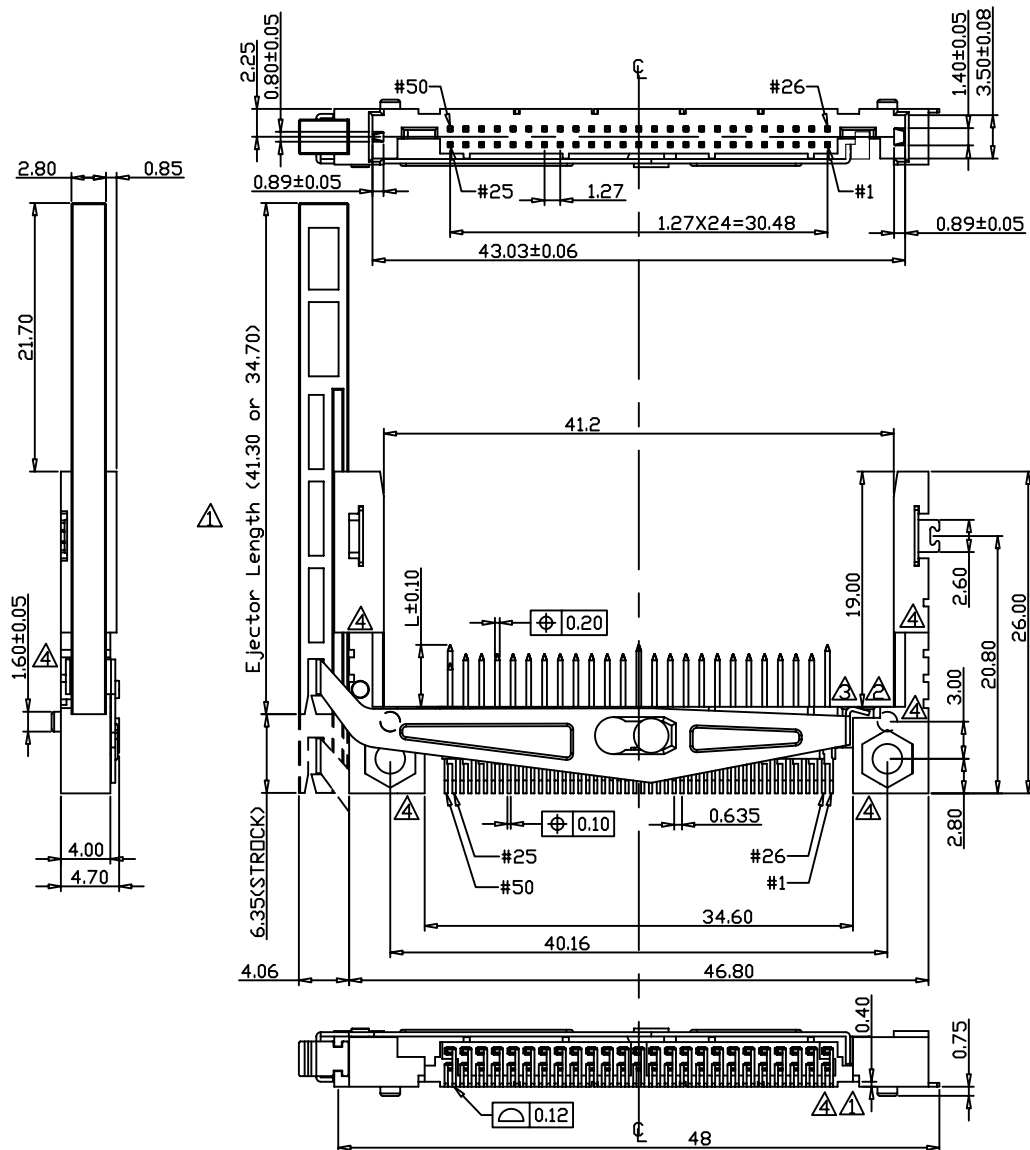

SPECIFICATION

MATERIAL

Insulator: L.C.P. , rated UL94V-0

Contacts: Brass

Pivot Shell: Stainless Steel


Mount Ear: Copper alloy(Tin/Lead plating overall)

CONTACT PLATING


Underplate: 50u" Nickel

Contact area: 5m"~30m" Selective Gold

Solder tails area: 100m" Tin/Lead



POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Dim. L	Pin No.

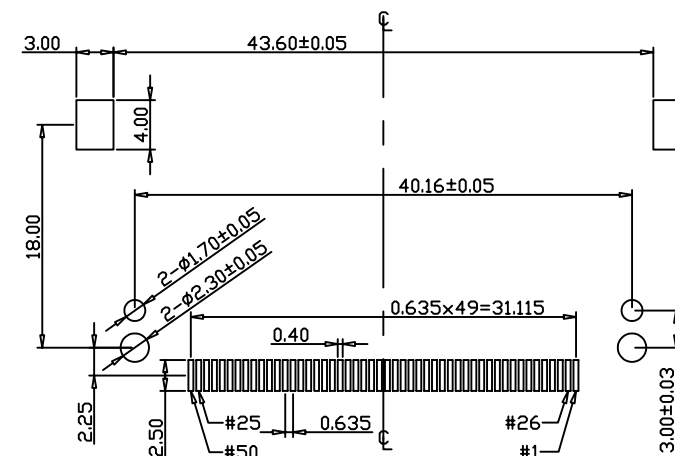

RECOMMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X.±

UNIT / mm

SCALE 1 : 1

.XX.±

DATE

.XXX.±

ANG.±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

CFC-PW40BE001RS-50-LF

SERIES T T T T T T LEADFREE

MALE

90°SMT

POST TO POST 40.16mm

B TYPE

EAR

ST

RIGHT EJECTOR

NORMAL

DESCRIPTION: CFA SLIM TYPE 2 (STANDARD) SLOT HEADER (STANDOFF 0 mm)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com