

SPECIFICATION

MATERIAL

Insulator: LCP, Rated UL94V-0

Contacts: Brass

Pivot Shell: Stainless Steel


Mount Ear: Copper Alloy (Tin/Lead Free Plating Overall)

CONTACT PLATING



Contact Area: Gold Plating Over 40µ" Nickel

Solder Tails: 100µ" Tin/Lead Free Over 40µ" Nickel

POWER	5.00mm	1,13,38,50
GENERAL	4.25mm	all other pins
DETECT	3.50mm	25,26
Pin type	Dim. L	Pin No.

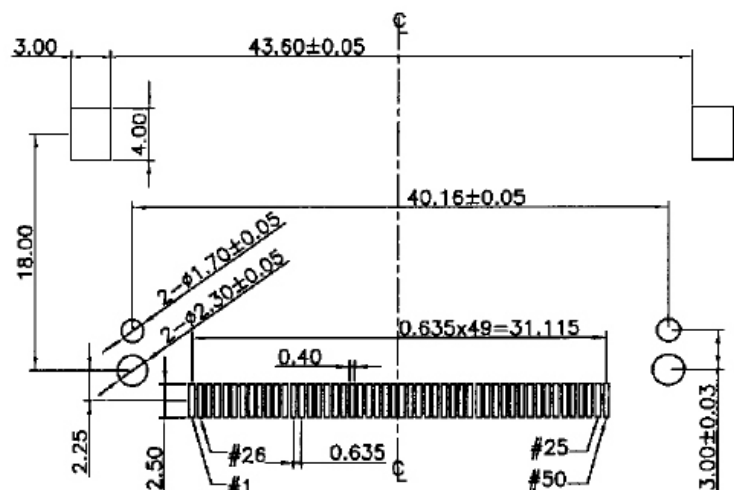

RECOMMENDED P.C.B LAYOUT

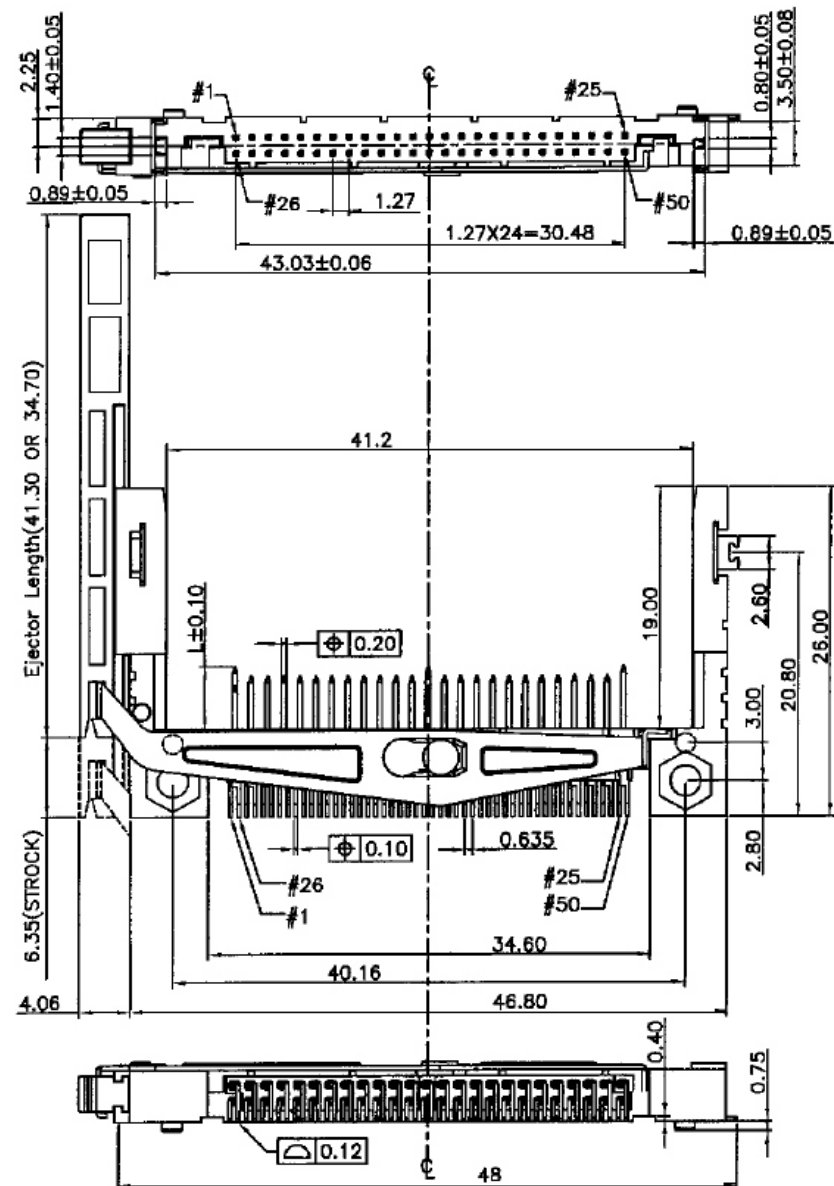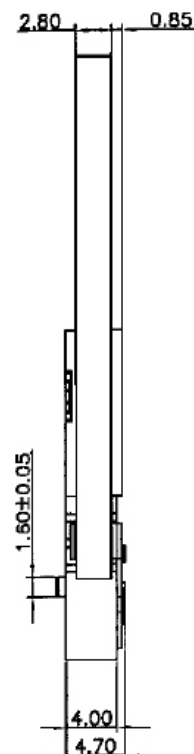

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CFC-PW40BE002RS-50-LF
SERIES T T T T T LEADFREE
MALE ST 50WAY
90°SMT RIGHT EJECTOR
POST TO POST 40.16mm B TYPE EAR RVS

DESCRIPTION: