

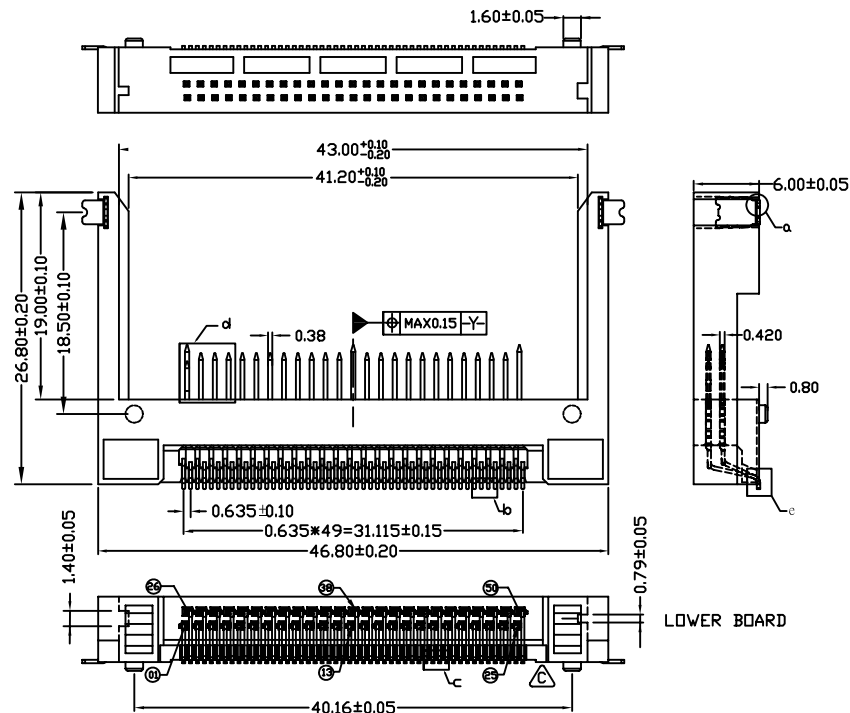



DETAIL a
SCALE 5/1




DETAIL b
SCALE 4/1




DETAIL c
SCALE 5/1



DETAIL d
SCALE 2/1




DETAIL e
SCALE 2/1

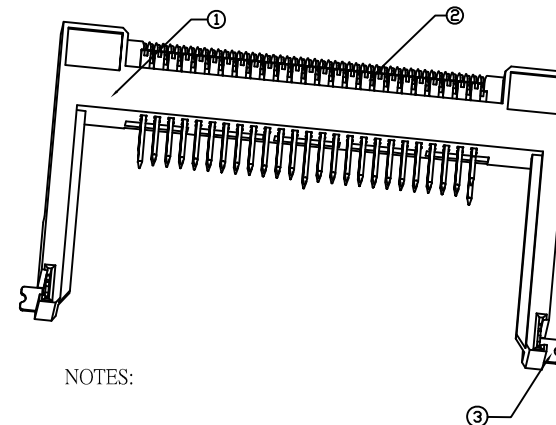

NOTES:

- 1.MATERIAL :
INSULATOR : LCP
COLOR : ECRU/BLACK
CONTACT : BRASS
MOUNT EAR : BRASS
- 2.PLATING :
② : CONTACT AREA : 10u" GOLD FLASH
UNDER PLATING : NICKEL OVERALL MIN40u"
SOLDER TAIL AREA : TIN MIN 120u"
③ : UNDER PLATING : NICKEL OVERALL MIN30u"
SOLDER TAIL AREA : TIN MIN 80u"

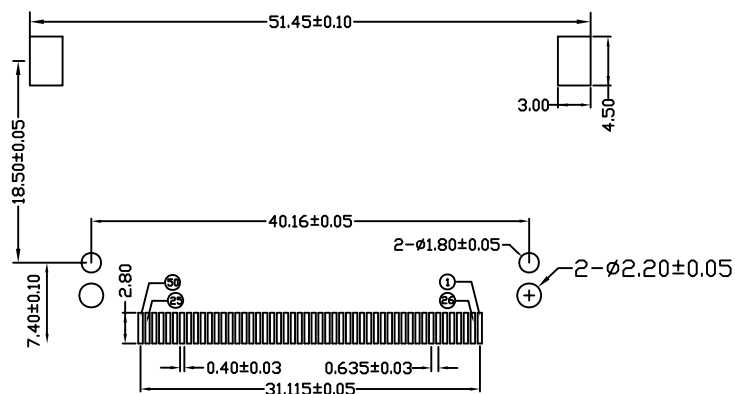

RECOMMENDED LOWER BOARD P.C.B LAYOUT

PIN NUMBER	DIM.L
25 26	3.50
ALL OTHER PINS	4.25
1 13 38 50	5.00

照片框

RoHS Compliant

TOLERANCES ARE

X. ±
.X ± 0.05
.XX ± 0.01
.XXX ± 0.002
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ORDER INFORMATION

CFC-PW40BX111-50-LF

SERIES

MALE

90°SMT

POST TO POST 40.16mm

B TYPE

TYPE 1

NON EAR

LEADFREE

50WAY

NORMAL

STANDOFF 1.7mm

DESCRIPTION: CF6.0公座板下型40.16 無螺絲孔腿長26.80成品

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com