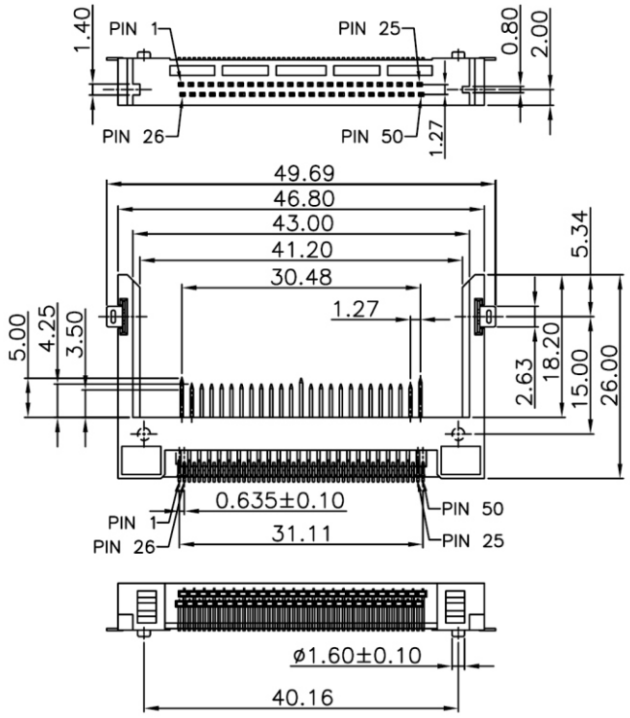


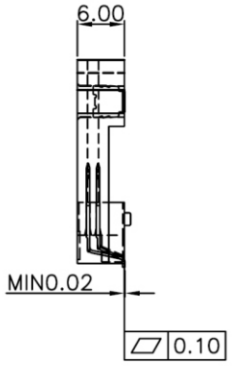




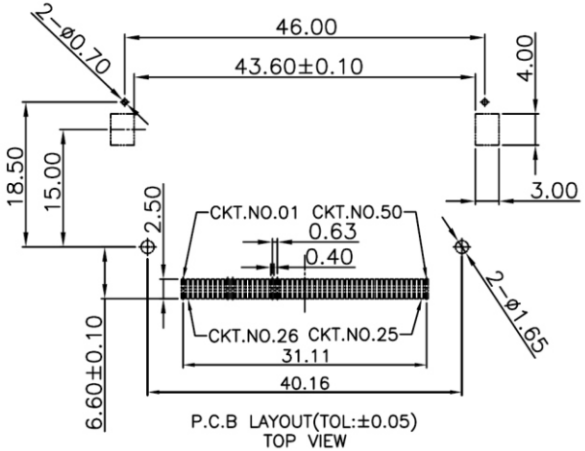


P.C.B LAYOUT(TOL:±0.05)
TOP VIEW

| PinType | Interface Dim. | Pin No. |
|---|---|---|
| Detect | 3.5mm | 25,26 |
| General | 4.25mm | All Other Pin |
| Power | 5.0mm | 1,13,38,50 |

Specification
*Electrical Characteristics:
Contact Current Rating:0.5 Amperes.
Dielectric Withstanding Voltage:AC 500V r.m.s.
IInsulation Resistance:1000 MΩ Minimum.
Contact Resistance:40 mΩ Maximum.
*Environmental:
Operating Temperature:−20°C~+60°C.
*Mechanical Characteristics
Contact Insertion Force:3.00kgf Maximum.
Contact Separation Force:0.50kgf Minimum.
*Material:
Insulator:HI−Temp Plastic UL94V−0 Rated.
Cantact:Copper Alloy.
Mount Ear : Copper Alloy.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

| | | |
|---|---|---|
| DRAWING BY CY | | TOLERANCES ARE |
| CHECKED BY GENIUS | | X. ± |
| UNIT / mm | SCALE 1 : 1 | .X ± |
| | | .XX ± |
| | | .XXX ± |
| DATE | | ANG ± |
| SIZE A4 | PPOJECTION | |

照片框

**ORDER INFORMATION**

CFC-PW40BX222-50-LF

SERIES
MALE
90°SMT
POST TO POST 40.16mm
B TYPE
NON EAR
TYPE 2
STANDOFF 2.0mm
RVS
50WAY
LEADFREE

DESCRIPTION: