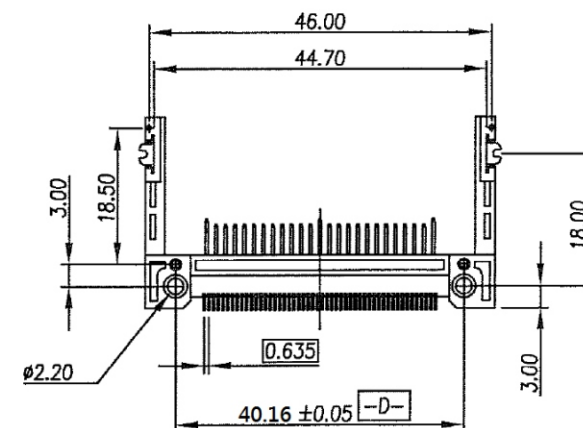

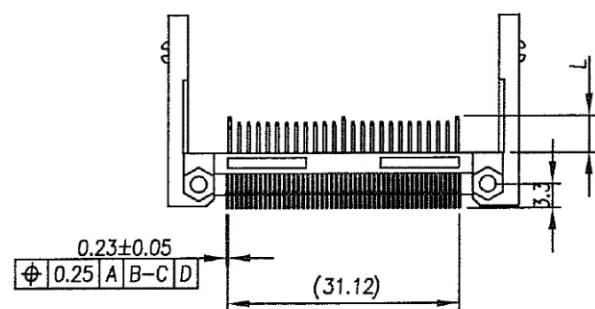
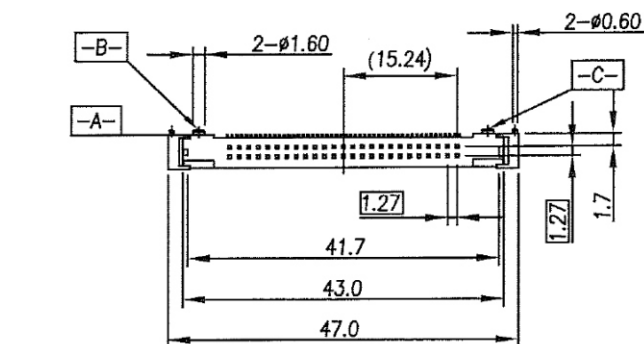


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION



照片框

ORDER INFORMATION

CFC-PW40CE001-50-LF

SERIES T T T T T LEADFREE
MALE 90°SMT EAR C TYPE
50WAY
NORMAL
POST TO POST 40.16mm

DESCRIPTION:

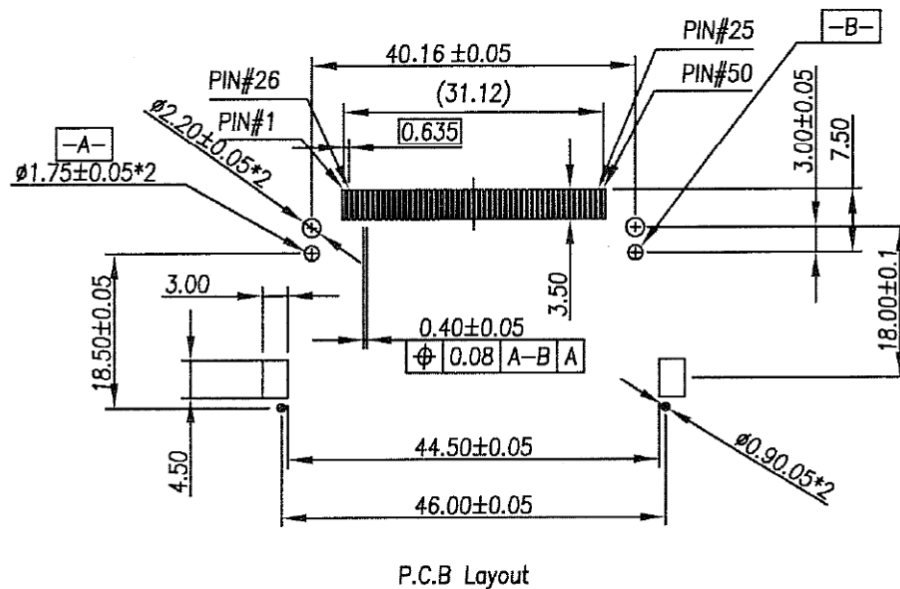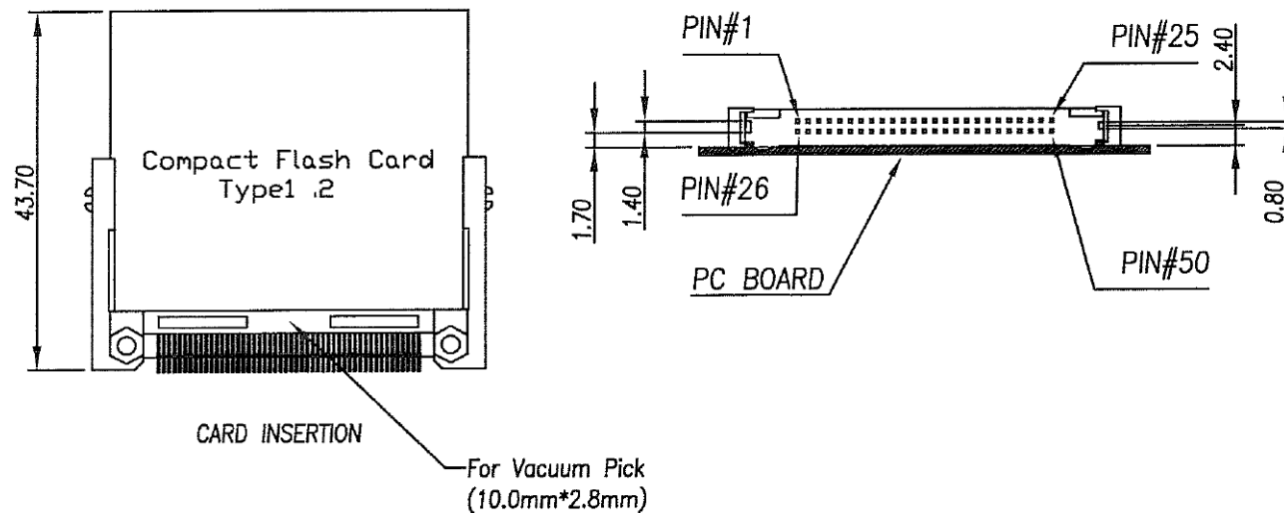

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0
 CONTACT : Copper Alloys
 VOLTAGE RATING : 100VAC
 CURRENT RATING : 0.5A
 CONTACT RESISTANCE:40 m Ohm max.
 INSULATION RESISTANCE:1000M Ohm min.
 DIELECTRIC STRENGTH : 500VAC/1min
 OPERATION TEMPERATURE : -40°C~85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.±
 .X±
 .XX±
 .XXX±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CFC-PW40CE001-50-LF
 SERIES T T T T T LEADFREE
 MALE T T T T T 50WAY
 90°SMT T T T T T NORMAL
 C TYPE
 POST TO POST 40.16mm

DESCRIPTION: