





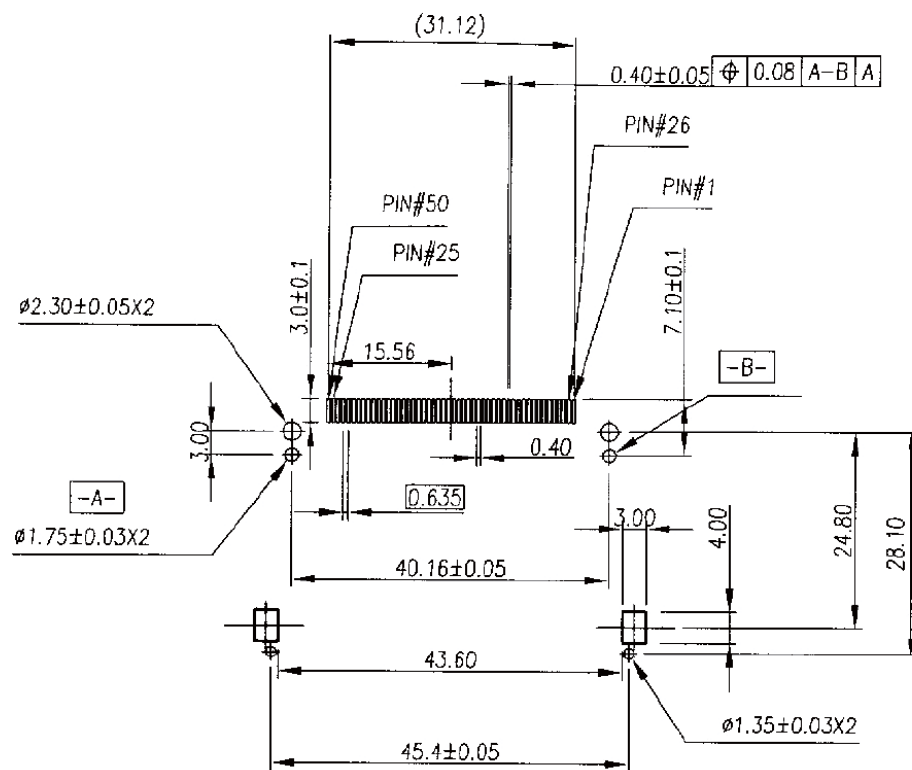

P.C.B Layout

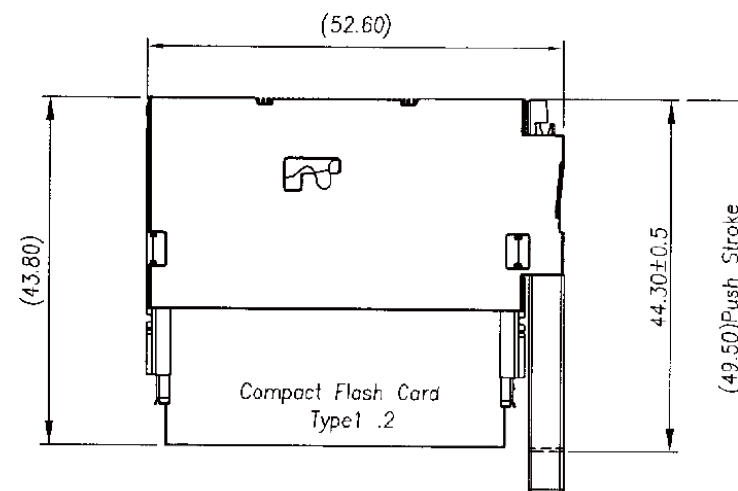

Header With Ejector

SPECIFICATIONS:

HOUSING : High Temperature Plastic, UL 94V-0  
 CONTACT : Copper Alloys  
 VOLTAGE RATING : 100VAC  
 CURRENT RATING : 0.5A  
 CONTACT RESISTANCE:40 m Ohm max.  
 INSULATION RESISTANCE:1000M Ohm min.  
 DIELECTRIC STRENGTH : 500VAC/1min  
 OPERATION TEMPERATURE : -40°C~85°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

CFC-PW40CE222RF-50-LF

SERIES 50WAY LEADFREE

MALE 90°SMT POST TO POST 40.16mm C TYPE EAR  
 RIGHT EJECTOR FULL METAL  
 RVS STANDOFF 2.0mm  
 TYPE 2

DESCRIPTION: CF TYPE 2,50PIN SMT REVERSE TYPE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION