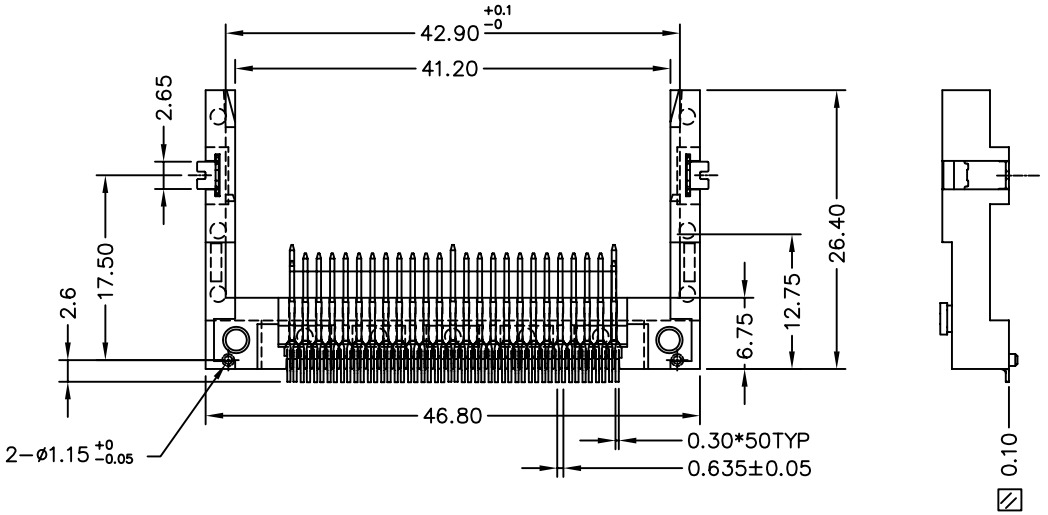

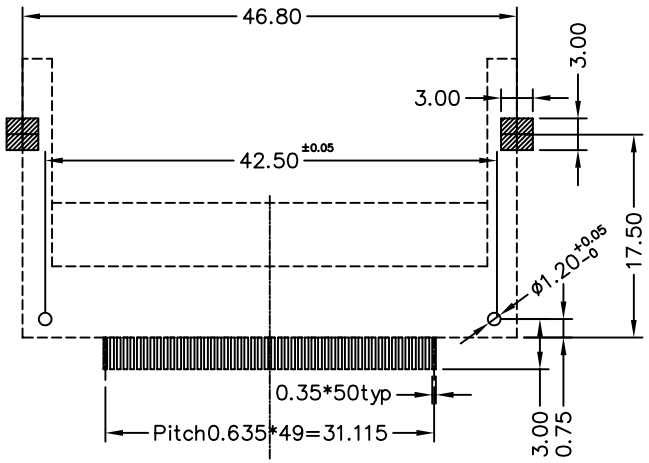

PCB Layout

NOTE:

A. Material:
1. Housing : LCP 30% G.F. , UL94−V0 rated
2. Contact : Copper allpy
3. Pad : Brass

B. Plating
1. Contact : Underplating 50u" min Nickel,
Contant area 15u" AU over Nickel plated.
Solder tail 100u" min Sn/Pb over Nickel plated.
2. Ped : 100u" min Sn/Pb over 50u" min Nickel plated.

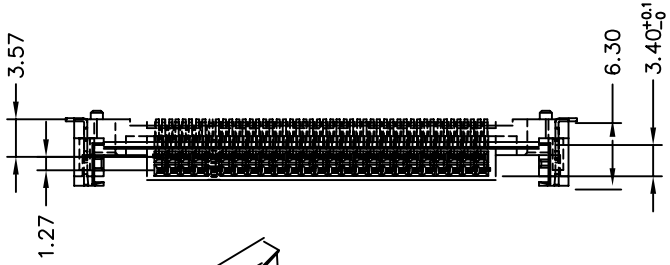

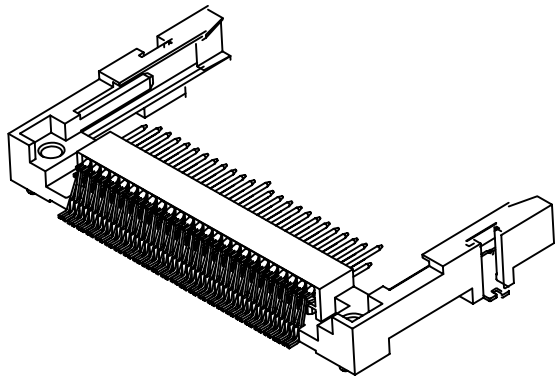

No push

Dimension L

Pin type	Circuit No.	Dimensions mm
Detect	1,13,38,50	5.0 ± 0.1
General	2 to 12 , 14 to 24 27 to 37 , 39 to 49	4.25 ± 0.1
Power	25 , 26	3.5 ± 0.1

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CFC-PW42BE021-50-LF

SERIES
MALE
90°SMT
POST TO POST 42.50mm
EAR
B TYPE
NORMAL
STANDOFF 2.1mm
50WAY
LEADFREE

DESCRIPTION: Compact Flash Card Socket SMT TYPE
(Reverse type fit Type II CF Card) Stand Off : 2.1mm & POST L=42.5mm