
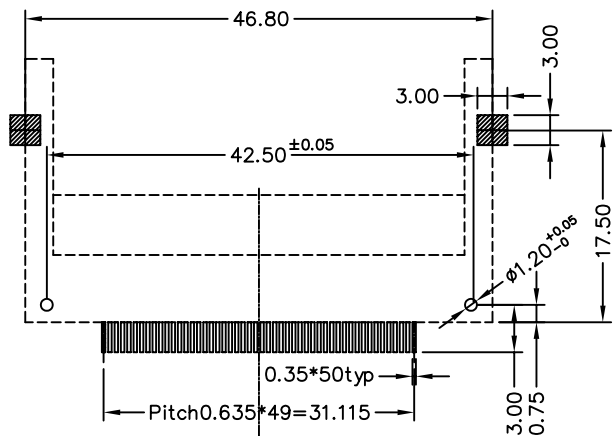


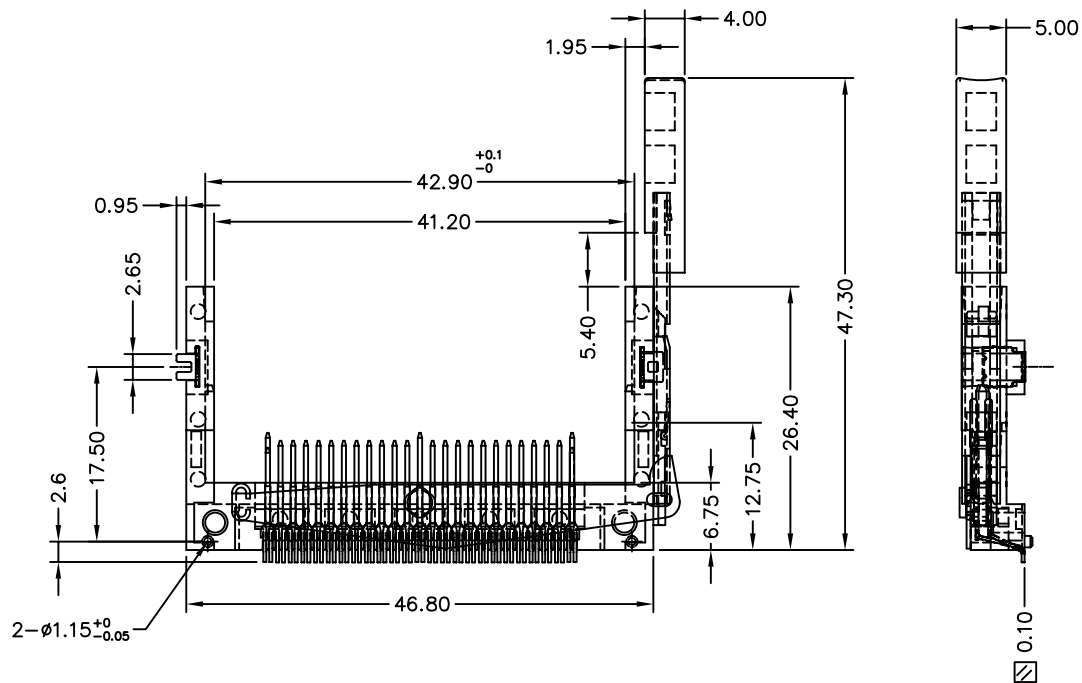

PCB Layout



NOTE:

A. Material:

1. Housing : LCP 30% G.F. , UL94-V0 rated
2. Contact : Copper alloy
3. Pad : Brass
4. Rotating arm : Stainless steel t=0.40
5. Push bar : Stainless steel t=0.30
6. Button : PBT 30% G.F. , UL94-V0 rated

B. Plating

1. Contact : Underplating 50u" min Nickel,
Contact area 15u" AU over Nickel plated.
Solder tail 100u" min Sn/Pb over Nickel plated.
2. Pad : 100u" min Sn/Pb over 50u" min Nickel plated.

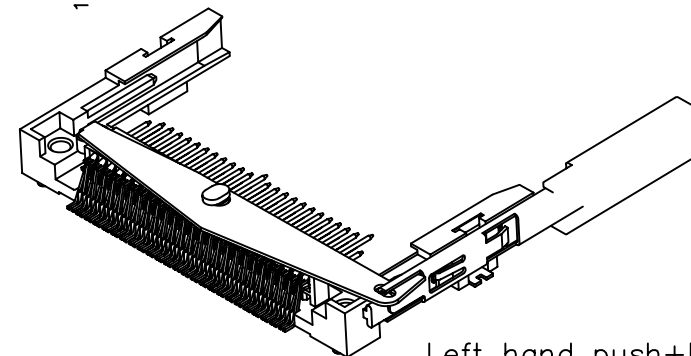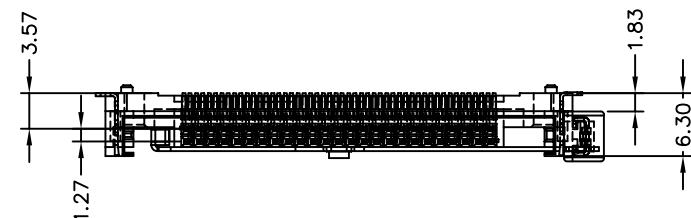

Left hand push+Button

Dimension L

Pin type	Circuit No.	Dimensions mm
Detect	1,13,38,50	5.0 ± 0.1
General	2 to 12 , 14 to 24 27 to 37 , 39 to 49	4.25 ± 0.1
Power	25 , 26	3.5 ± 0.1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CFC-PW42BE021LS-50-LF

SERIES MALE 90°SMT POST TO POST 42.50mm B TYPE EAR ST 50WAY LEADFREE LEFT EJECTOR NORMAL STANDOFF 2.1mm

DESCRIPTION: Compact Flash Card Socket SMT TYPE
(Reverse type fit Type II CF Card) Stand Off : 2.1mm & POST L=42.5mm