


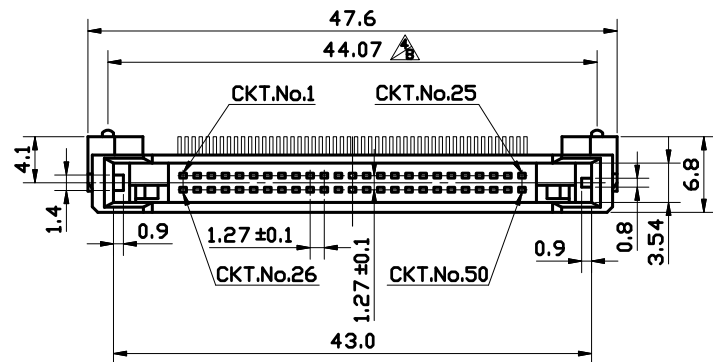
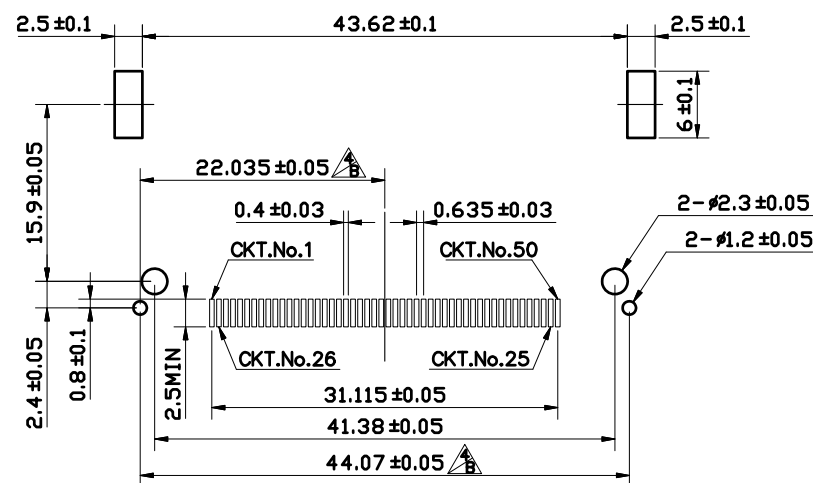
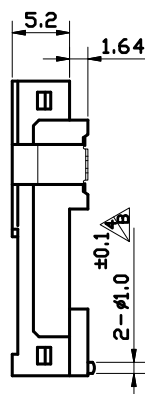


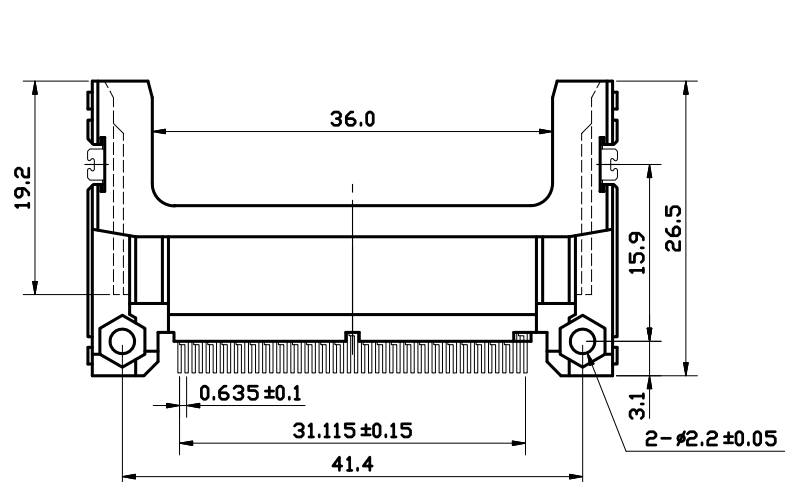

NOTES:
 MATERIAL
 Insulator:Glass Reinforced LCP UL94V-0
 Contacts:Brass Alloy
 Mount ear:Brass ; Tin plated overall
 CONTACT PLATING
 Contact area: Gold plating over 40u" Nickel
 Solder tail area:100u" tin plating over 40u" Nickel

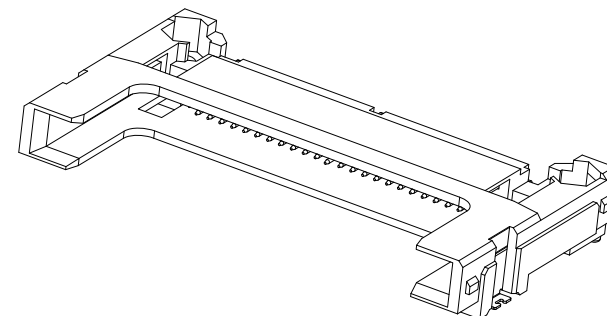

RECOMMENDED P.C.B. LAYOUT

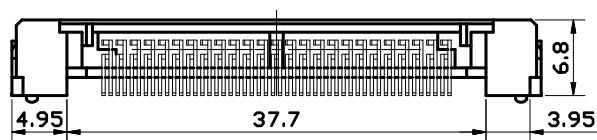

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CFC-PW44BE112-50-LF

SERIES

MALE

90°SMT

TYPE 1

EAR

B TYPE

LEADFREE

50WAY

RVS

STANDOFF 1.64mm

POST TO POST 44.0mm

DESCRIPTION: CF CARD HEADER SMT 50P TYPE I (ARS)